



YOUSHANG SEMICONDUCTOR

设计研发新型功率器件

各类小信号开关

中低压及高压大电流等场效应管

0755-83047638

ysbdt@szyoushang.cn

www.szyoushang.cn



企业微信二维码



企业QQ二维码

Features

- Ideally Suited for Automatic Insertion
- Epitaxial Planar Die Construction
- Complementary PNP Types: NK-BC807-xxW
- For switching and AF Amplifier Applications


Mechanical Data

- Case: SOT323
- Case Material: molded plastic, "Green" molding compound
UL Flammability Classification Rating 94V-0
- Moisture Sensitivity: Level 1 per J-STD-020
- Terminals: Finish – Matte Tin Plated Leads, Solderable per
MIL-STD-202, Method 208 ^{Ⓔ3}
- Weight 0.006 grams (approximate)


SOT323



Top View



Device Symbol



Top View
Pin-Out

Absolute Maximum Ratings (@ $T_A = +25^\circ\text{C}$, unless otherwise specified.)

| Characteristic | Symbol | Value | Unit |
|------------------------------|-----------|-------|------|
| Collector-Base Voltage | V_{CBO} | 50 | V |
| Collector-Emitter Voltage | V_{CEO} | 45 | V |
| Emitter-Base Voltage | V_{EBO} | 5 | V |
| Continuous Collector Current | I_C | 500 | mA |
| Peak Collector Current | I_{CM} | 1.0 | A |
| Peak Base Current | I_{BM} | 200 | mA |

Thermal Characteristics (@ $T_A = +25^\circ\text{C}$, unless otherwise specified.)

| Characteristic | Symbol | Value | Unit |
|---|-----------------|-------------|--------------------|
| Power Dissipation | P_D | 200 | mW |
| Thermal Resistance, Junction to Ambient | $R_{\theta JA}$ | 625 | $^\circ\text{C/W}$ |
| Operating and Storage Temperature Range | T_J, T_{STG} | -65 to +150 | $^\circ\text{C}$ |

ESD Ratings (Note 6)

| Characteristic | Symbol | Value | Unit | JEDEC Class |
|--|---------|-------|------|-------------|
| Electrostatic Discharge - Human Body Model | ESD HBM | 4,000 | V | 3A |
| Electrostatic Discharge - Machine Model | ESD MM | 400 | V | C |

Electrical Characteristics (@ $T_A = +25^\circ\text{C}$, unless otherwise specified.)

| Characteristic | Symbol | Min | Typ | Max | Unit | Test Condition | |
|---|---------------|--------------|-----|------------|---------------------|--|--|
| Collector-Emitter Breakdown Voltage (Note 7) | BV_{CEO} | 45 | — | — | V | $I_C = 10\text{mA}$ | |
| Emitter-Base Breakdown Voltage | BV_{EBO} | 5 | — | — | V | $I_C = 100\mu\text{A}$ | |
| Collector-Emitter Cutoff Current | I_{CES} | — | — | 100 5.0 | nA μA | $V_{CE} = 45\text{V}$ $V_{CE} = 25\text{V}, T_J = +150^\circ\text{C}$ | |
| Collector-Base Cutoff Current | I_{CBO} | — | — | 100 5.0 | nA μA | $V_{CE} = 20\text{V}$ $V_{CE} = 20\text{V}, T_J = +150^\circ\text{C}$ | |
| Emitter-Base Cutoff Current | I_{EBO} | — | — | 100 | nA | $V_{EB} = 5\text{V}$ | |
| DC Current Gain (Note 7) | h_{FE} | NK-BC817-16W | 100 | — | 250 | — | $I_C = 100\text{mA}, V_{CE} = 1.0\text{V}$ |
| | | NK-BC817-25W | 160 | | 400 | | |
| | | NK-BC817-40W | 250 | | 600 | | |
| | | NK-BC817-16W | 60 | — | — | — | $I_C = 300\text{mA}, V_{CE} = 1.0\text{V}$ |
| | | NK-BC817-25W | 100 | | | | |
| | | NK-BC817-40W | 170 | | | | |
| Collector-Emitter Saturation Voltage (Note 7) | $V_{CE(SAT)}$ | — | — | 700 | mV | $I_C = 500\text{mA}, I_B = 50\text{mA}$ | |
| Base-Emitter Voltage (Note 7) | V_{BE} | — | — | 1200 | mV | $I_C = 300\text{mA}, V_{CE} = 1.0\text{V}$ | |
| Gain Bandwidth Product | f_T | 100 | — | — | MHz | $V_{CE} = 5.0\text{V}, I_C = 10\text{mA}, f = 50\text{MHz}$ | |
| Collector-Base Capacitance | C_{CBO} | — | — | 12 | pF | $V_{CB} = 10\text{V}, f = 1.0\text{MHz}$ | |

- Notes:
- For a device mounted on minimum recommended pad layout 1oz copper that is on a single-sided FR4 PCB; device is measured under still air conditions whilst operating in a steady-state.
 - Refer to JEDEC specification NK-JESD22-A114 and NK-JESD22-A115.
 - Measured under pulsed conditions. Pulse width $\leq 300\mu\text{s}$. Duty cycle $\leq 2\%$.

Typical Electrical Characteristics (@ $T_A = +25^\circ\text{C}$, unless otherwise specified.)

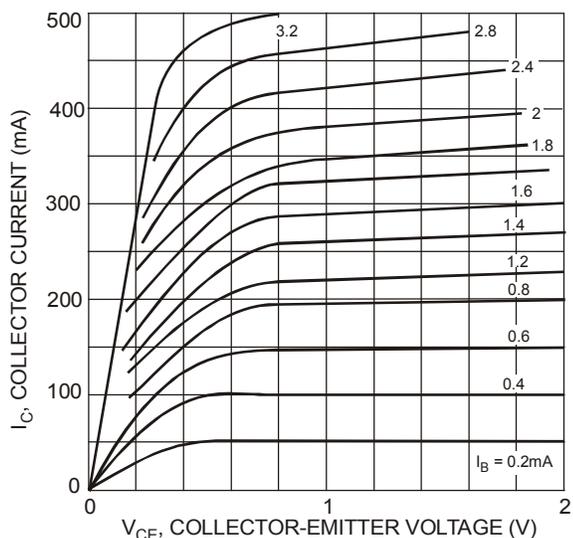


Figure 1 Typical Collector Current vs. Collector-Emitter Voltage

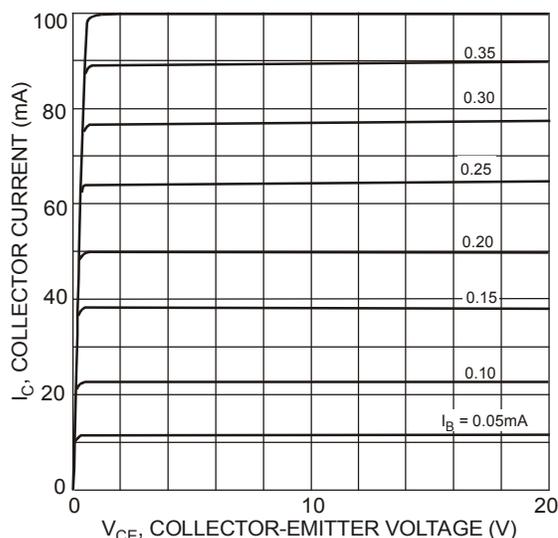


Figure 2 Typical Collector Current vs. Collector-Emitter Voltage

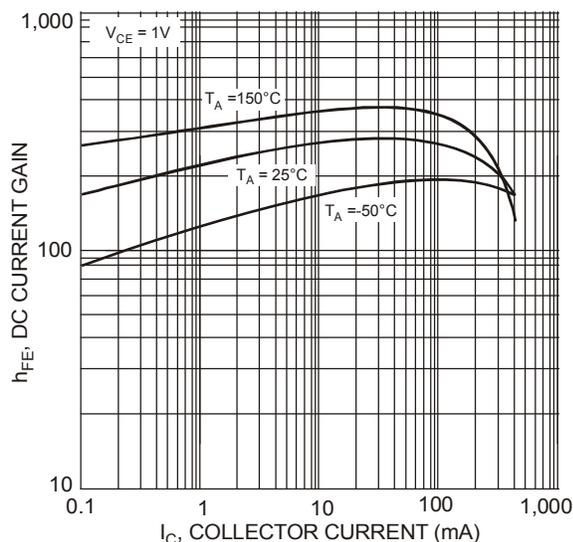


Figure 3 Typical DC Current Gain vs. Collector Current

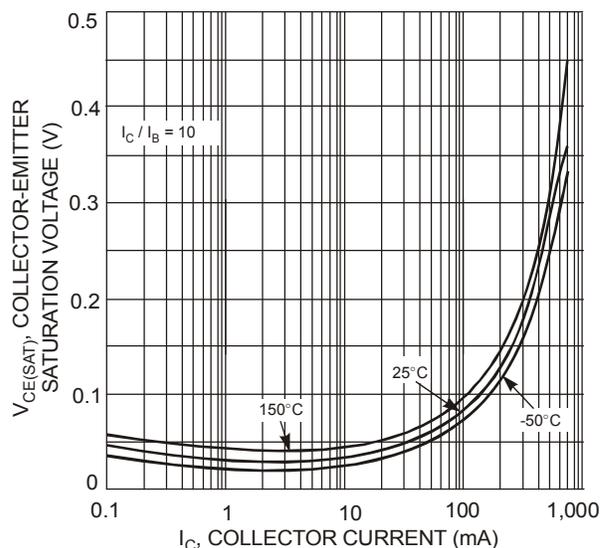


Figure 4 Typical Collector-Emitter Saturation Voltage vs. Collector Current


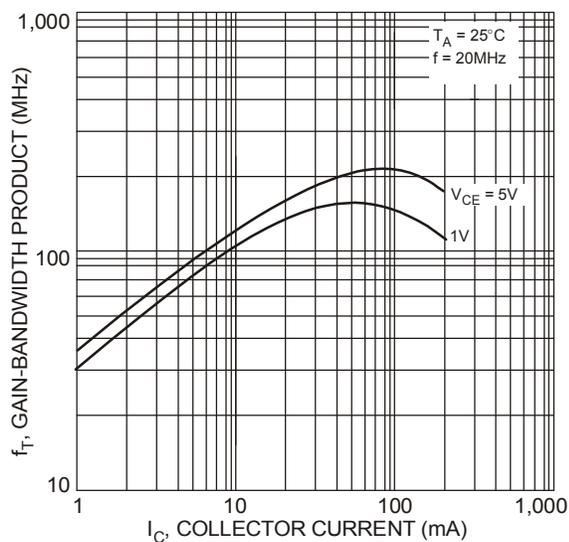



Figure 5 Typical Gain-Bandwidth Product vs. Collector Current

Package Outline Dimensions

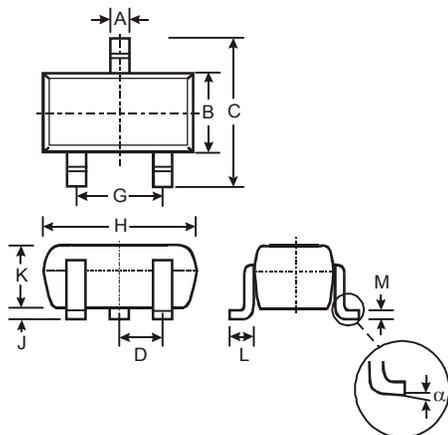

| SOT323 | | | |
|----------------------|------|------|------|
| Dim | Min | Max | Typ |
| A | 0.25 | 0.40 | 0.30 |
| B | 1.15 | 1.35 | 1.30 |
| C | 2.00 | 2.20 | 2.10 |
| D | - | - | 0.65 |
| G | 1.20 | 1.40 | 1.30 |
| H | 1.80 | 2.20 | 2.15 |
| J | 0.0 | 0.10 | 0.05 |
| K | 0.90 | 1.00 | 1.00 |
| L | 0.25 | 0.40 | 0.30 |
| M | 0.10 | 0.18 | 0.11 |
| α | 0° | 8° | - |
| All Dimensions in mm | | | |

Suggested Pad Layout

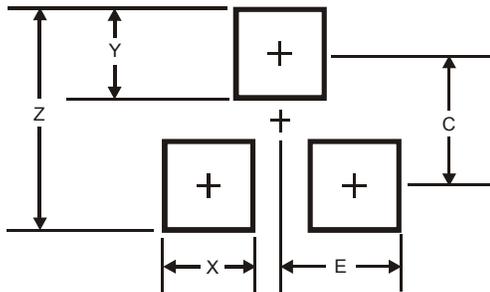

| Dimensions | Value (in mm) |
|------------|---------------|
| Z | 2.8 |
| X | 0.7 |
| Y | 0.9 |
| C | 1.9 |
| E | 1.0 |