



YOUSHANG SEMICONDUCTOR

**设计研发新型功率器件**

**各类小信号开关**

**中低压及高压大电流等场效应管**

0755-83047638

ysbdt@szyoushang.cn

www.szyoushang.cn



企业微信二维码



企业QQ二维码

## Features

- $BV_{CEO} > 60V$
- $I_C = 3A$  Continuous Collector Current
- $I_{CM} = 8A$  Peak Pulse Current
- $R_{CE(SAT)} < 90m\Omega$
- Rated to +175°C – Ideal for High Ambient Temperature Environments
- **Lead-Free Finish; RoHS Compliant (Notes 1 & 2)**
- **Halogen and Antimony Free. “Green” Device (Note 3)**
- **An Automotive-Compliant Part is Available Under Separate Datasheet ([DXTN3C60PSQ](#))**

## Mechanical Data

- Case: PowerDI<sup>®</sup> 5060-8
- Case Material: Molded Plastic, “Green” Molding Compound. UL Flammability Classification Rating 94V-0
- Moisture Sensitivity: Level 1 per J-STD-020
- Terminal Finish - Matte Tin Annealed over Copper Leadframe; Solderable per MIL-STD-202, Method 208 <sup>Ⓔ</sup>
- Weight: 0.097 grams (Approximate)


## Applications

- Power Management
- Load Switch
- Linear Mode Voltage Regulator
- Backlighting Applications


PowerDI5060-8




Top View



Bottom View



Internal Schematic



Top View  
Pin Configuration

**Absolute Maximum Ratings** (@T<sub>A</sub> = +25°C, unless otherwise specified.)

Characteristic	Symbol	Value	Unit
Collector-Base Voltage	V <sub>CBO</sub>	60	V
Collector-Emitter Voltage	V <sub>CEO</sub>	60	V
Emitter-Base Voltage	V <sub>EBO</sub>	7	V
Base Current	I <sub>B</sub>	500	mA
Continuous Collector Current	I <sub>C</sub>	3	A
Peak Pulse Collector Current	I <sub>CM</sub>	8	A

**Thermal Characteristics** (@T<sub>A</sub> = +25°C, unless otherwise specified.)






Characteristic	Symbol	Value	Unit
Power Dissipation	P <sub>D</sub>	2.5	W
Thermal Resistance, Junction to Ambient	R <sub>θJA</sub>	(Note 5)	60
		(Note 6)	140
Thermal Resistance, Junction to Case	R <sub>θJC</sub>	(Note 5, 7)	2
		(Note 6, 7)	12
Operating and Storage Temperature Range	T <sub>J</sub> , T <sub>STG</sub>	-55 to +175	°C

**ESD Ratings** (Note 8)

Characteristic	Symbol	Value	Unit	JEDEC Class
Electrostatic Discharge - Human Body Model	ESD HBM	8000	V	3A
Electrostatic Discharge - Machine Model	ESD MM	400	V	C

- Notes:
5. For a device mounted with the collector lead on 25mm x 25mm 2oz copper that is on a single-sided 1.6mm FR4 PCB; device is measured under still air conditions whilst operating in a steady-state.
  6. Same as note (5), except mounted on minimum recommended pad layout.
  7. Thermal resistance from junction to the top of the case.
  8. Refer to JEDEC specification JESD22-A114 and JESD22-A115.

**Typical Thermal Characteristics** (@ $T_A = +25^\circ\text{C}$ , unless otherwise specified.)


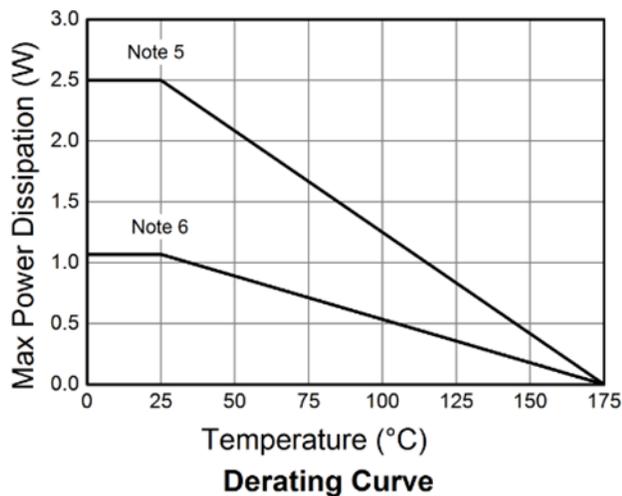
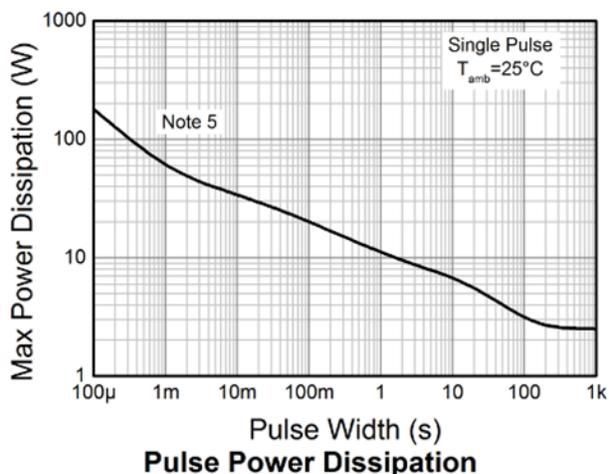
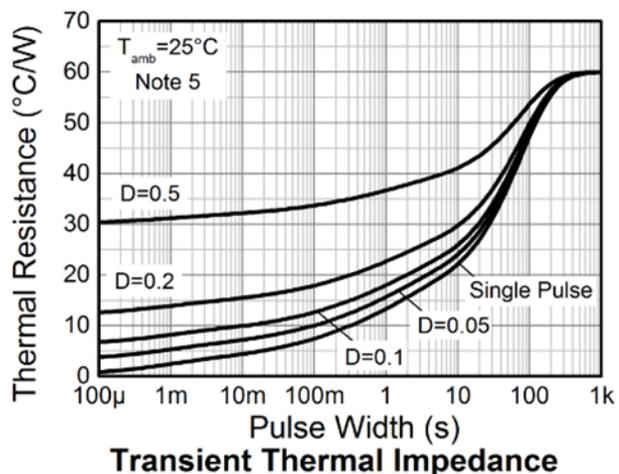
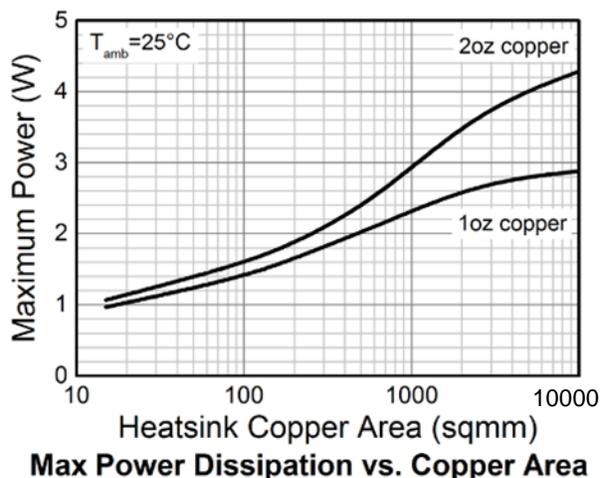
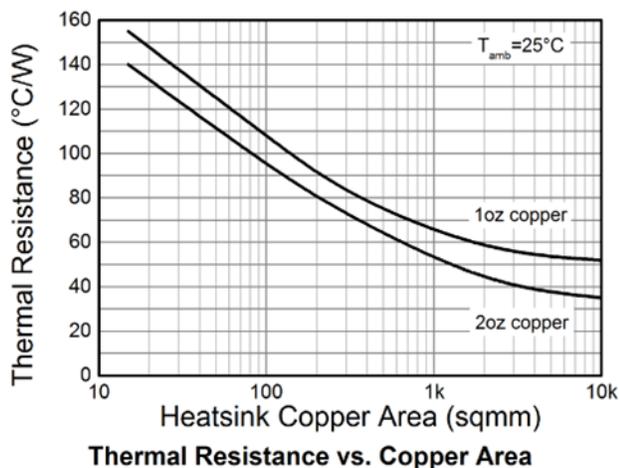


**Electrical Characteristics** (@T<sub>A</sub> = +25°C, unless otherwise specified.)



Characteristic	Symbol	Min	Typ	Max	Unit	Test Condition
<b>OFF CHARACTERISTICS</b>						
Collector-Base Breakdown Voltage	BV <sub>CBO</sub>	60	—	—	V	I <sub>C</sub> = 100μA
Collector-Emitter Breakdown Voltage (Note 9)	BV <sub>CEO</sub>	60	—	—	V	I <sub>C</sub> = 10mA
Emitter-Base Breakdown Voltage	BV <sub>EBO</sub>	7	—	—	V	I <sub>E</sub> = 100μA
Collector-Base Cutoff Current	I <sub>CBO</sub>	—	—	100	nA	V <sub>CB</sub> = 48V
		—	—	50	μA	V <sub>CB</sub> = 48V @T <sub>J</sub> = +150°C
Emitter Cutoff Current	I <sub>EBO</sub>	—	—	100	nA	V <sub>EB</sub> = 7V
Collector-Emitter Cutoff Current	I <sub>CES</sub>	—	—	100	nA	V <sub>CES</sub> = 48V
<b>ON CHARACTERISTICS (Note 9)</b>						
DC Current Gain	h <sub>FE</sub>	200	400	—	—	I <sub>C</sub> = 500mA, V <sub>CE</sub> = 2V
		200	330	—		I <sub>C</sub> = 1A, V <sub>CE</sub> = 2V
		100	180	—		I <sub>C</sub> = 2A, V <sub>CE</sub> = 2V
		50	100	—		I <sub>C</sub> = 3A, V <sub>CE</sub> = 2V
Collector-Emitter Saturation Voltage	V <sub>CE(SAT)</sub>	—	70	120	mV	I <sub>C</sub> = 1A, I <sub>B</sub> = 50mA
		—	180	270	mV	I <sub>C</sub> = 3A, I <sub>B</sub> = 300mA
Collector-Emitter Saturation Resistance	R <sub>CE(SAT)</sub>	—	60	90	mΩ	I <sub>C</sub> = 3A, I <sub>B</sub> = 300mA
Base-Emitter Saturation Voltage	V <sub>BE(SAT)</sub>	—	0.86	1.0	V	I <sub>C</sub> = 1A, I <sub>B</sub> = 100mA
		—	1.0	1.2		I <sub>C</sub> = 2A, I <sub>B</sub> = 200mA
Base-Emitter Turn-On Voltage	V <sub>BE(ON)</sub>	—	0.65	0.85	V	I <sub>C</sub> = 0.1A, V <sub>CE</sub> = 2V
<b>SMALL SIGNAL CHARACTERISTICS</b>						
Current Gain-Bandwidth Product	f <sub>T</sub>	—	140	—	MHz	V <sub>CE</sub> = 10V, I <sub>C</sub> = 100mA, f = 10MHz
Output Capacitance	C <sub>obo</sub>	—	17	—	pF	V <sub>CB</sub> = 10V, f = 1MHz
Delay Time	t <sub>D</sub>	—	15	—	ns	V <sub>CC</sub> = 12.5V, I <sub>C</sub> = 1A I <sub>B1</sub> = -I <sub>B2</sub> = 0.05A
Rise Time	t <sub>R</sub>	—	120	—	ns	
Turn-On Time	t <sub>(ON)</sub>	—	135	—	ns	
Storage Time	t <sub>S</sub>	—	800	—	ns	
Fall Time	t <sub>F</sub>	—	300	—	ns	
Turn-Off Time	t <sub>(OFF)</sub>	—	1100	—	ns	

Note: 9. Measured under pulsed conditions. Pulse width ≤ 300μs. Duty cycle ≤ 2%.


**Typical Electrical Characteristics** (@ $T_A = +25^\circ\text{C}$ , unless otherwise specified.)

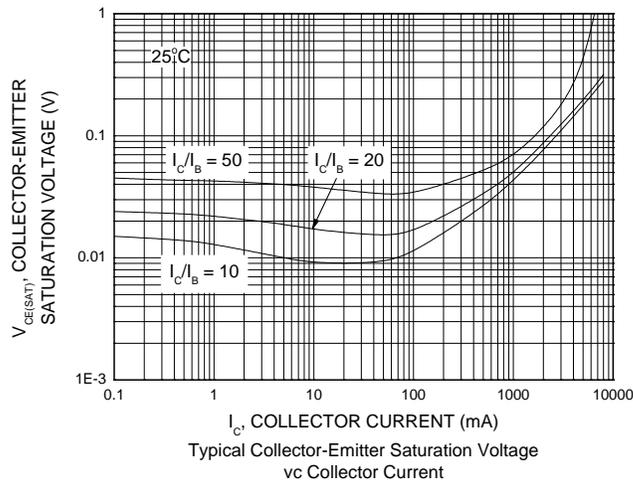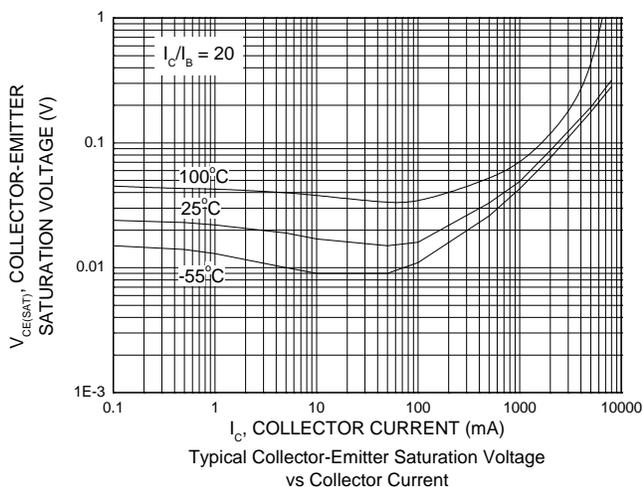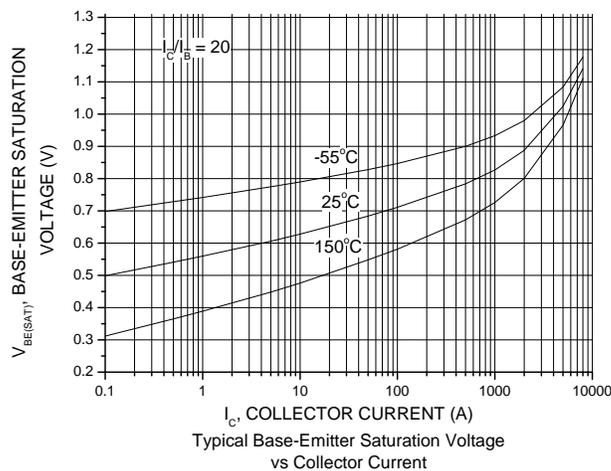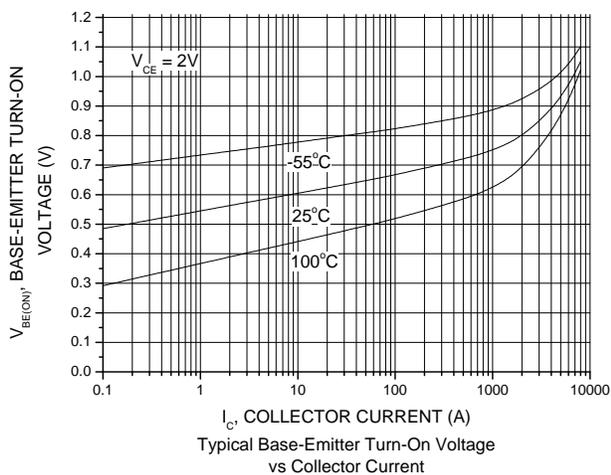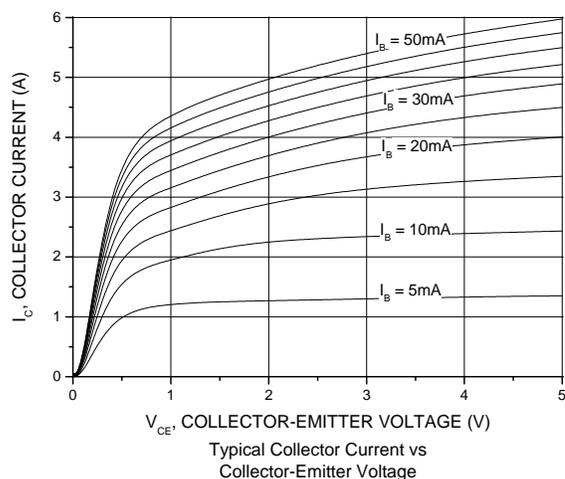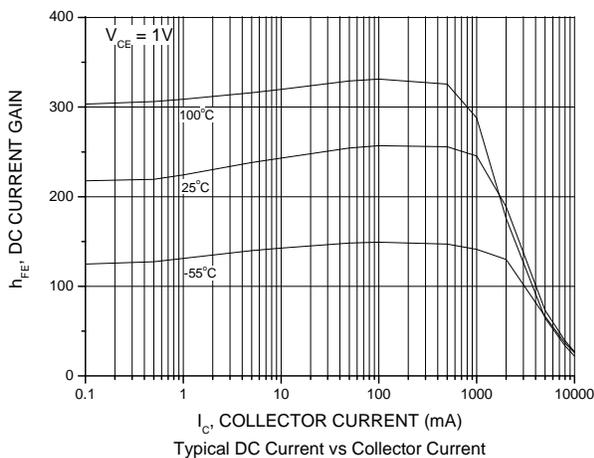

Typical Electrical Characteristics (@T<sub>A</sub> = +25°C, unless otherwise specified.) (continued)

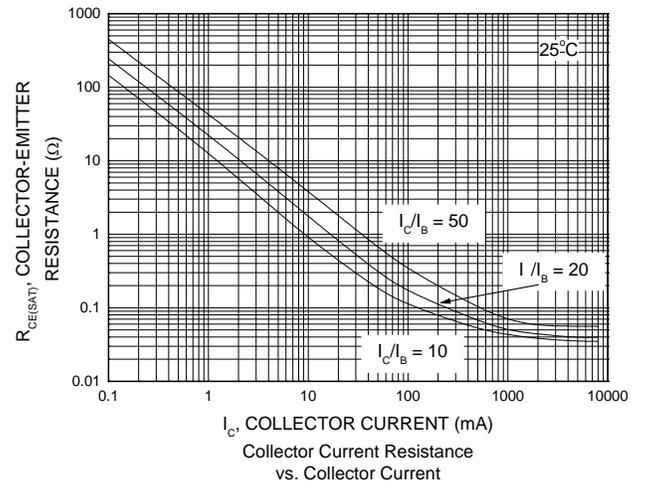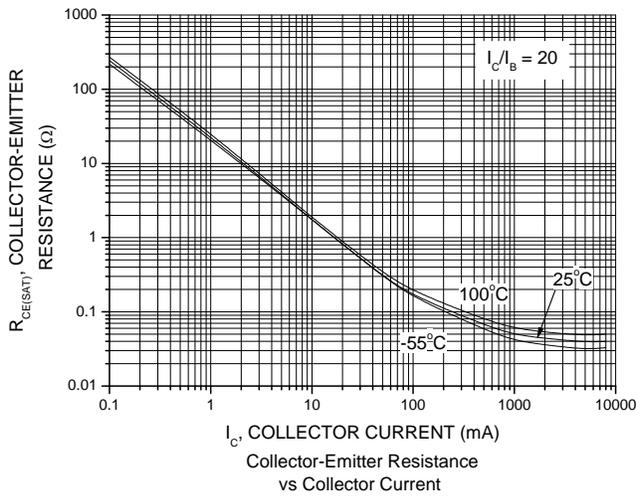


## Package Outline Dimensions

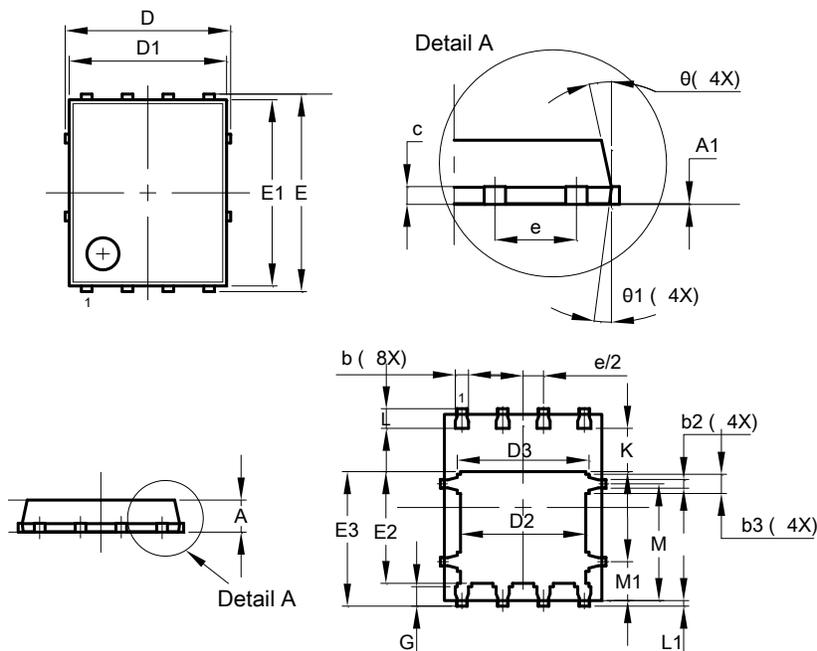**PowerDI5060-8**


PowerDI5060-8			
Dim	Min	Max	Typ
A	0.90	1.10	1.00
A1	0.00	0.05	-
b	0.33	0.51	0.41
b2	0.200	0.350	0.273
b3	0.40	0.80	0.60
c	0.230	0.330	0.277
D	5.15 BSC		
D1	4.70	5.10	4.90
D2	3.70	4.10	3.90
D3	3.90	4.30	4.10
E	6.15 BSC		
E1	5.60	6.00	5.80
E2	3.28	3.68	3.48
E3	3.99	4.39	4.19
e	1.27 BSC		
G	0.51	0.71	0.61
K	0.51	-	-
L	0.51	0.71	0.61
L1	0.100	0.200	0.175
M	3.235	4.035	3.635
M1	1.00	1.40	1.21
θ	10°	12°	11°
θ1	6°	8°	7°
All Dimensions in mm			

## Suggested Pad Layout

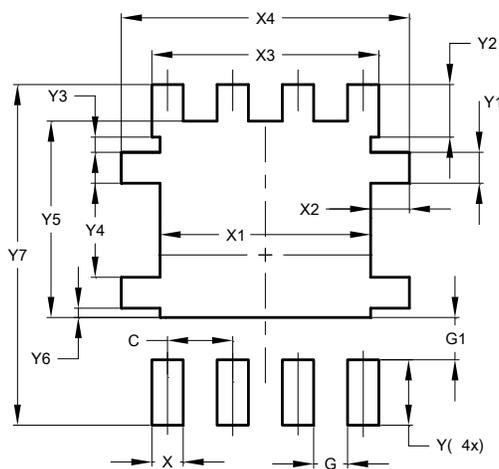**PowerDI5060-8**


Dimensions	Value (in mm)
C	1.270
G	0.660
G1	0.820
X	0.610
X1	4.100
X2	0.755
X3	4.420
X4	5.610
Y	1.270
Y1	0.600
Y2	1.020
Y3	0.295
Y4	1.825
Y5	3.810
Y6	0.180
Y7	6.610