



YOUSHANG SEMICONDUCTOR

设计研发新型功率器件

各类小信号开关

中低压及高压大电流等场效应管

0755-83047638

ysbdt@szyoushang.cn

www.szyoushang.cn



企业微信二维码



企业QQ二维码

Features

- $BV_{CEO} > -20V$
- $BV_{ECO} > -4V$
- $I_C = -5.5A$ Continuous Collector Current
- $I_{CM} = -15A$ Peak Current
- Guaranteed Gain at I_C of $-10A$
- $V_{CE(SAT)} < -44mV @ -1A$
- $R_{CE(SAT)} = 26m\Omega$
- 1.5W Power Dissipation
- Complementary PNP Type: NK-ZXTN19020DFF

Description

Advanced process capability and package design have been used to maximize the power handling and performance of this small outline transistor. The compact size and ratings of this device make it ideally suited to applications where space is at a premium.

Mechanical Data

- Case: SOT23F
- Case Material: Molded Plastic. "Green" Molding Compound. UL Flammability Classification Rating 94V-0
- Moisture Sensitivity: Level 1 per J-STD-020
- Terminals: Finish – Matte Tin Plated Leads, Solderable per MIL-STD-202, Method 208 Ⓔ3
- Weight: 0.012 grams (Approximate)


Applications

- MOSFET and IGBT Gate Driving
- Power Switches
- Motor Control


SOT23F



Top View



Device Symbol

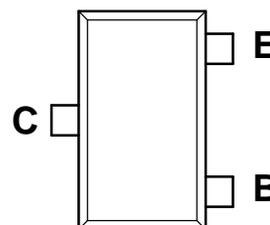

Top View
Pin Configuration

Absolute Maximum Ratings (@T_A = +25°C, unless otherwise specified.)

Characteristic	Symbol	Value	Unit
Collector-Base Voltage	V _{CBO}	-25	V
Collector-Emitter Voltage (Base Open)	V _{CEO}	-20	V
Emitter – Collector Voltage (Reverse Blocking)	V _{ECO}	-4	V
Emitter-Base Voltage	V _{EBO}	-7	V
Continuous Collector Current	I _C	-5.5	A
Peak Pulse Current	I _{CM}	-15	A
Base Current	I _B	-1	A

Thermal Characteristics (@T_A = +25°C, unless otherwise specified.)





Characteristic		Symbol	Value	Unit
Power Dissipation Linear Derating Factor	(Note 5)	P _D	0.84	W mW/°C
	(Note 6)		6.72	
	(Note 7)		1.34	
	(Note 8)		10.72	
	(Note 8)		1.50	
Thermal Resistance, Junction to Ambient	(Note 5)	R _{θJA}	12.0	°C/W
	(Note 6)		2.0	
	(Note 7)		16.0	
	(Note 8)		93	
Thermal Resistance, Junction to Lead	(Note 9)	R _{θJL}	83	°C/W
Operating and Storage Temperature Range		T _J , T _{STG}	-55 to +150	°C

ESD Ratings (Note 10)

Characteristic	Symbol	Value	Unit	JEDEC Class
Electrostatic Discharge – Human Body Model	ESD HBM	4,000	V	3A
Electrostatic Discharge – Machine Model	ESD MM	400	V	C

- Notes:
- For a device mounted with the exposed collector pad on 15mm x 15mm 1oz copper that is on a single-sided 1.6mm FR4 PCB; device is measured under still air conditions whilst operating in a steady-state.
 - Same as Note 5, except the device is mounted on 25mm x 25mm 2oz copper.
 - Same as Note 5, except the device is mounted on 50mm x 50mm 2oz copper.
 - Same as Note 7, whilst measured at t < 5 seconds.
 - Thermal resistance from junction to solder-point (at the end of the collector lead).
 - Refer to JEDEC specification JESD22-A114 and JESD22-A115.

Thermal Characteristics and Derating Information



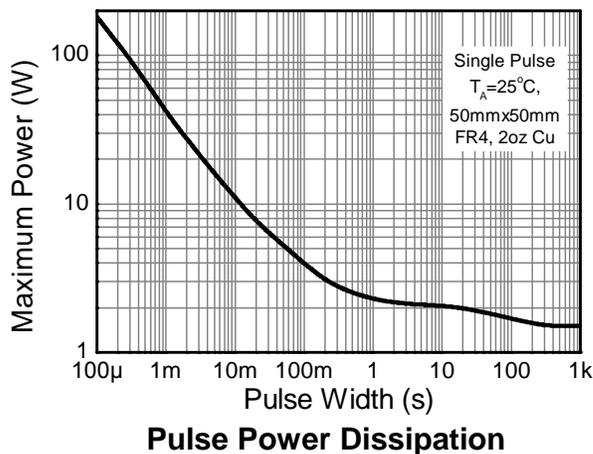
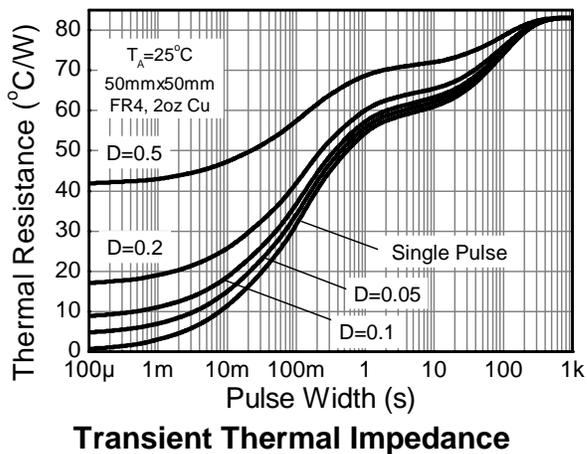
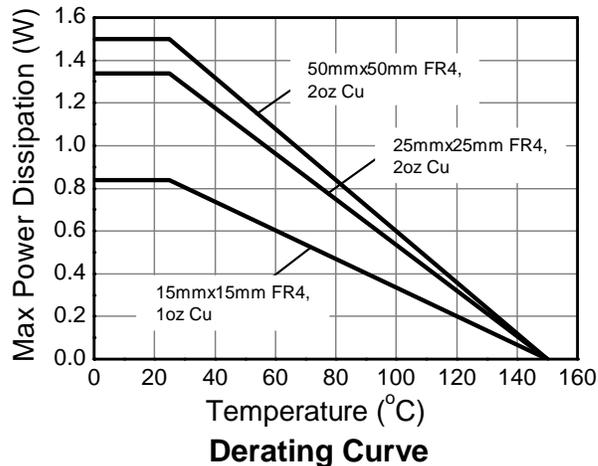
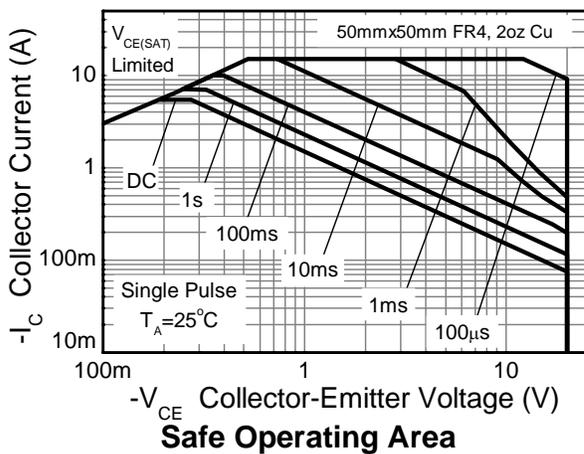


Electrical Characteristics (@ $T_A = +25^\circ\text{C}$, unless otherwise specified.)


Characteristic	Symbol	Min	Typ	Max	Unit	Test Condition
OFF CHARACTERISTICS						
Collector-Base Breakdown Voltage	BV_{CBO}	-25	-55	—	V	$I_C = -100\mu\text{A}$
Collector-Emitter Breakdown Voltage (Base Open) (Note 11)	BV_{CEO}	-20	-50	—	V	$I_C = -10\text{mA}$
Emitter-Base Breakdown Voltage	BV_{EBO}	-7	-8.6	—	V	$I_E = -100\mu\text{A}$
Emitter – Collector Breakdown Voltage (Reverse Blocking)	BV_{ECX}	-4	-8.6	—	V	$I_E = -100\mu\text{A}$, $R_{BC} < 1\text{k}\Omega$, or $0.25\text{V} > V_{BC} > -0.25\text{V}$
Emitter – Collector Breakdown Voltage (Base Open)	BV_{ECO}	-4	-8.6	—	V	$I_E = -100\mu\text{A}$
Collector-Base Cut-off Current	I_{CBO}	—	<-1	-50	nA	$V_{CB} = -25\text{V}$
Emitter-Base Cut-off Current	I_{EBO}	—	<-1	-50	nA	$V_{CB} = -25\text{V}$, $T_A = +100^\circ\text{C}$
ON CHARACTERISTICS (Note 11)						
Static Forward Current Transfer Ratio	h_{FE}	300 200 85 25 —	450 310 130 50 20	900 — — — —	—	$I_C = -0.1\text{A}$, $V_{CE} = -2\text{V}$ $I_C = -2\text{A}$, $V_{CE} = -2\text{V}$ $I_C = -5.5\text{A}$, $V_{CE} = -2\text{V}$ $I_C = -10\text{A}$, $V_{CE} = -2\text{V}$ $I_C = -15\text{A}$, $V_{CE} = -2\text{V}$
Collector-Emitter Saturation Voltage	$V_{CE(SAT)}$	—	-37 -90 -105 -160 -145	-44 -125 -140 -210 -175	mV	$I_C = -1\text{A}$, $I_B = -100\text{mA}$ $I_C = -1\text{A}$, $I_B = -10\text{mA}$ $I_C = -2\text{A}$, $I_B = -40\text{mA}$ $I_C = -5\text{A}$, $I_B = -250\text{mA}$ $I_C = -5.5\text{A}$, $I_B = -550\text{mA}$
Base-Emitter Saturation Voltage	$V_{BE(SAT)}$	—	-975	-1050	mV	$I_C = -5.5\text{A}$, $I_B = -550\text{mA}$
Base-Emitter On Voltage	$V_{BE(ON)}$	—	-830	-900	mV	$I_C = -5.5\text{A}$, $V_{CE} = -2\text{V}$
SMALL SIGNAL CHARACTERISTICS						
Transition Frequency	f_T	—	176	—	MHz	$I_C = -50\text{mA}$, $V_{CE} = -10\text{V}$, $f = 50\text{MHz}$
Input Capacitance	C_{iBO}	—	—	400	pF	$V_{EB} = -0.5\text{V}$, $f = 1\text{MHz}$
Output Capacitance	C_{oBO}	—	36	45	pF	$V_{CB} = -10\text{V}$, $f = 1\text{MHz}$
Delay Time	t_D	—	23	—	ns	$V_{CC} = -10\text{V}$, $I_C = -1\text{A}$, $I_{B1} = -I_{B2} = 50\text{mA}$
Rise Time	t_R	—	18	—	ns	
Storage Time	t_S	—	266	—	ns	
Fall Time	t_F	—	50	—	ns	

 Note: 11. Measured under pulsed conditions. Pulse width $\leq 300\mu\text{s}$. Duty cycle $\leq 2\%$.

Typical Electrical Characteristics (@ $T_A = +25^\circ\text{C}$, unless otherwise specified.)

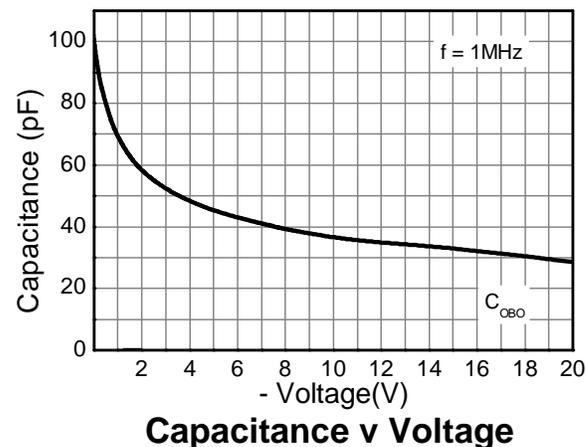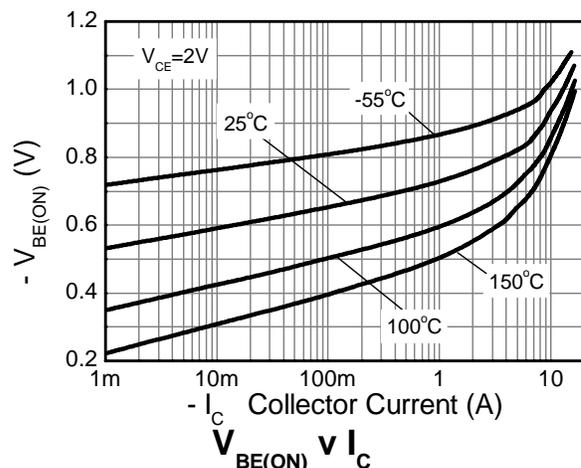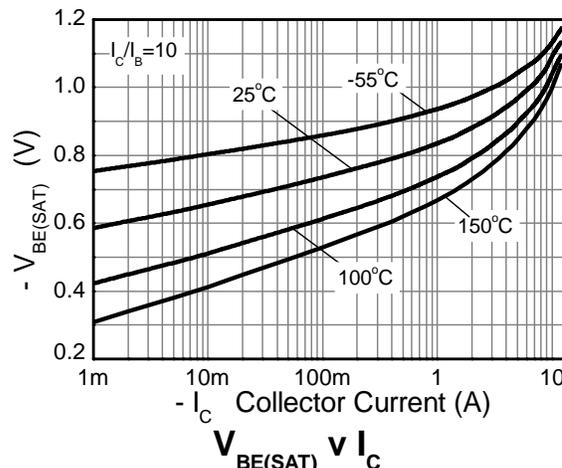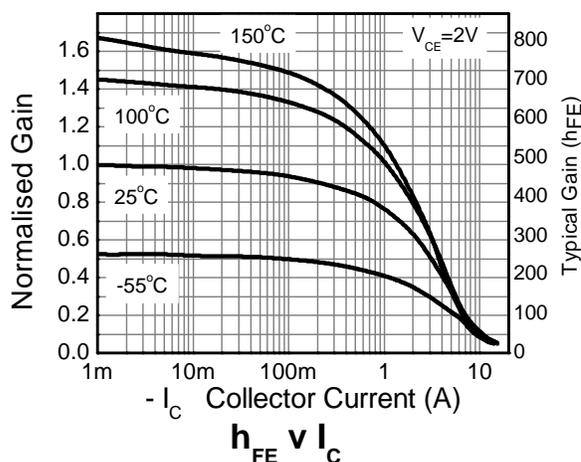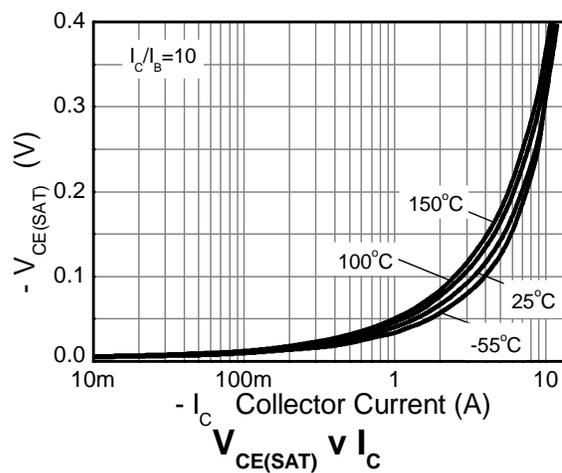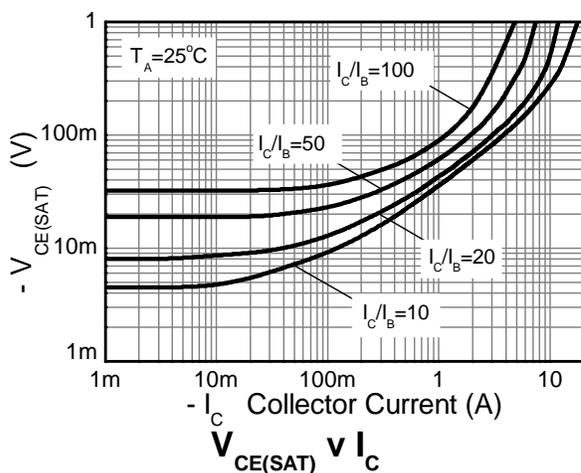


Package Outline Dimensions

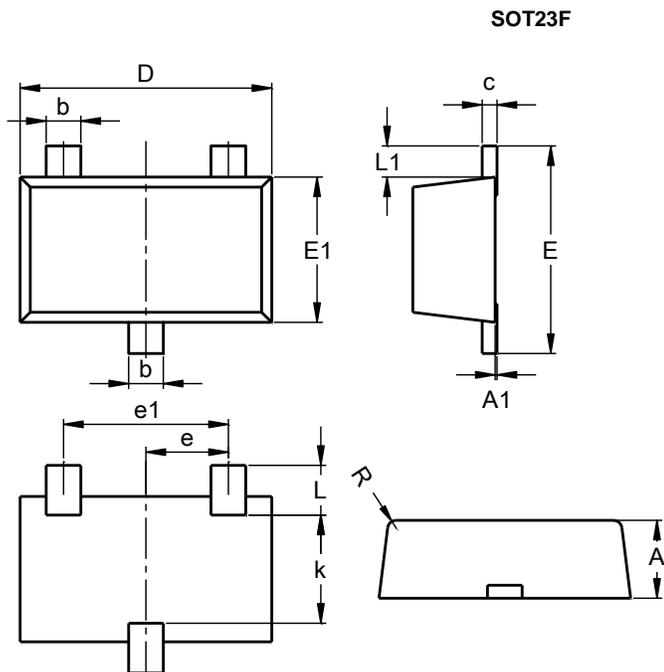

SOT23F			
Dim	Min	Max	Typ
A	0.80	1.00	0.90
A1	0.00	0.10	0.01
b	0.35	0.50	0.44
c	0.10	0.20	0.16
D	2.80	3.00	2.90
e	0.95 REF		
e1	1.90 REF		
E	2.30	2.50	2.40
E1	1.50	1.70	1.65
k	1.20	-	-
L	0.30	0.65	0.50
L1	0.30	0.50	0.40
R	0.05	0.15	-
All Dimensions in mm			

Suggested Pad Layout

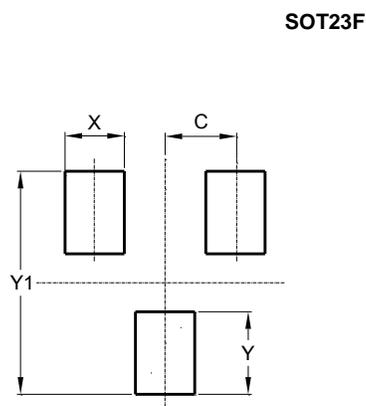

Dimensions	Value (in mm)
C	0.95
X	0.80
Y	1.110
Y1	3.000