



YOUSHANG SEMICONDUCTOR

设计研发新型功率器件

各类小信号开关

中低压及高压大电流等场效应管

0755-83047638

ysbdt@szyoushang.cn

www.szyoushang.cn



企业微信二维码



企业QQ二维码

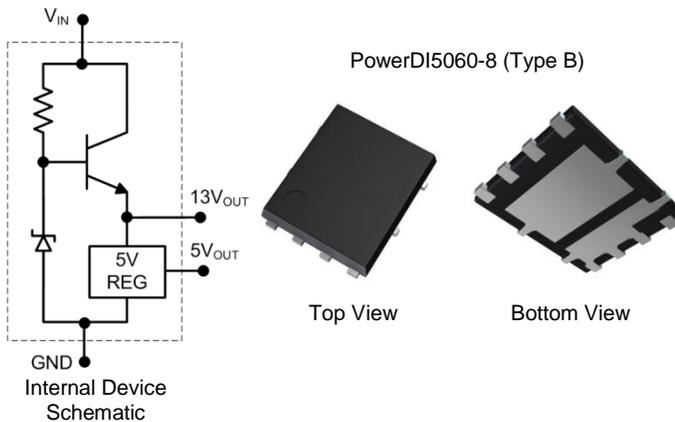
Description

The NK-ZXTR1135PD8 is a high voltage regulator with fixed dual outputs of 5V and 13V giving up to 50mA drive per channel. It is designed for use in high voltage applications where standard linear regulators cannot be used. This function is fully integrated into a PowerDI®5060-8 (Type B) package, minimizing PCB area and reducing number of components when compared with a multi-chip discrete solution. The high voltage regulator can deliver up to 100mA output current (Note 1).

Applications

Supply voltage regulation in:

- Networking
- Telecom
- Power Over Ethernet (PoE)

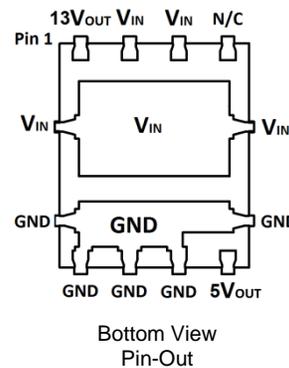


Features

- Series Linear Regulator Using Emitter-Follower Stage
- Input Voltage = 18 to 100V
- Output Voltage 1 = $5V \pm 2\%$
- Output Voltage 2 = $13V \pm 10\%$
- Output Current up to 50mA per Channel

Mechanical Data

- Case: PowerDI5060-8
- Case Material: Molded Plastic. "Green" Molding Compound. UL Flammability Rating 94V-0
- Moisture Sensitivity: Level 1 per J-STD-020
- Terminals: Finish - Matte Tin Plated Leads, Solderable per MIL-STD-202, Method 208③
- Weight: 0.104 grams (Approximate)



Pin Name	Pin Function
V_{IN}	Input Supply
GND	Power Ground
$5V_{OUT}$	5V Output
$13V_{OUT}$	13V Output
N/C	Not Connected

Absolute Maximum Ratings

 (Voltage relative to GND, @ $T_A = +25^\circ\text{C}$, unless otherwise specified.)

Characteristic		Symbol	Value	Unit
Input Voltage		V_{IN}	-0.3 to +100	V
Continuous Input & Output Current	$5V_{OUT}$	I_{IN}, I_{OUT}	100	mA
	$13V_{OUT}$		525	
Peak Pulsed Input & Output Current	$5V_{OUT}$	I_{IM}, I_{OM}	100	mA
	$13V_{OUT}$		2,000	

Maximum Current

 (@ $V_{IN} = 48\text{V}$, $T_A = +25^\circ\text{C}$, unless otherwise specified.)

Characteristic		Symbol	Value	Unit
Continuous Output Current	$5V_{OUT}$ (Note 8)	I_{OUT}	50	mA
	$13V_{OUT}$ (Note 9)		53	
Pulsed Output Current	$5V_{OUT}$ (Note 10)	I_{OM}	100	mA
	$13V_{OUT}$ (Note 11)		1,000	
	$5V_{OUT}$ (Note 12)		100	
	$13V_{OUT}$ (Note 13)		210	

Thermal Characteristics

 (@ $T_A = +25^\circ\text{C}$, unless otherwise specified.)

Characteristic		Symbol	Value	Unit
Power Dissipation	(Note 6)	P_D	1.85	W
	(Note 7)		0.94	
Thermal Resistance, Junction to Ambient	(Note 6)	$R_{\theta JA}$	54.1	$^\circ\text{C/W}$
	(Note 7)		106.4	
Thermal Resistance, Junction to Lead	(Note 14)	$R_{\theta JL}$	8	$^\circ\text{C/W}$
Thermal Resistance, Junction to Case	(Note 14)	$R_{\theta JC}$	15	
Maximum Operating Junction Temperature Range		T_J	-55 to +125	$^\circ\text{C}$
Storage Temperature Range		T_{STG}	-65 to +150	$^\circ\text{C}$

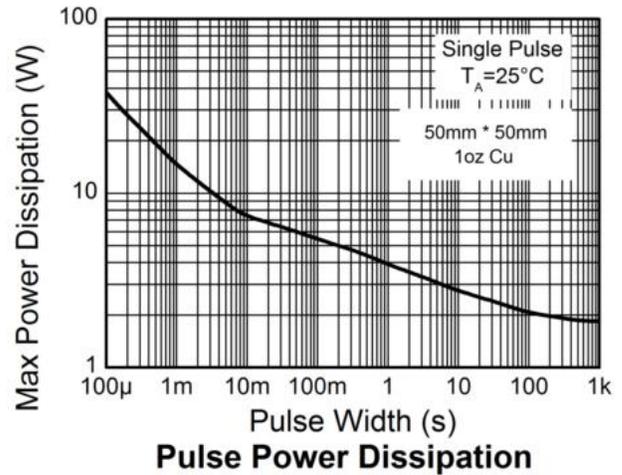
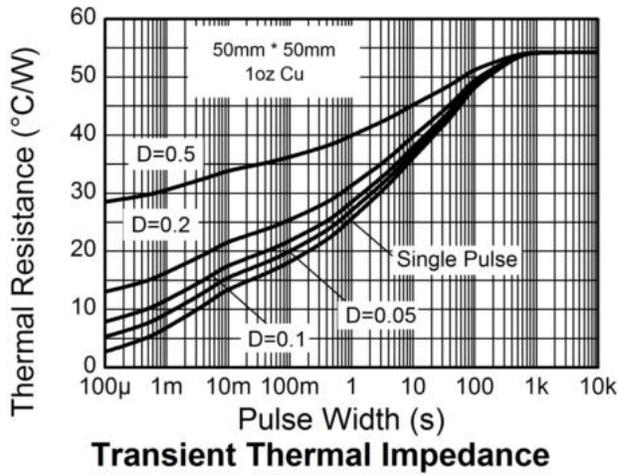
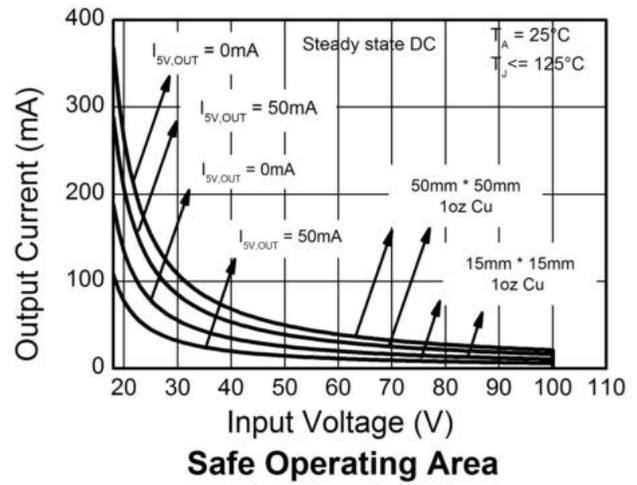
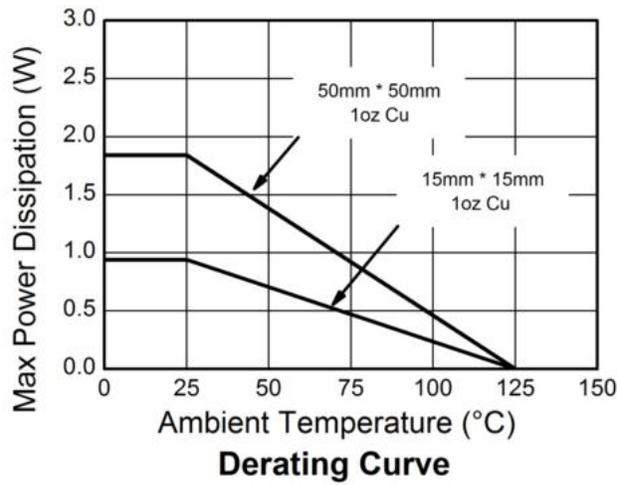
ESD Ratings

 (Note 15)

Characteristics	Symbols	Value	Unit	JEDEC Class
Electrostatic Discharge – Human Body Model	ESD HBM	4,000	V	3A
Electrostatic Discharge – Machine Model	ESD MM	400	V	C

- Notes:
- For a device mounted with the exposed V_{IN} pad on 50mm x 50mm 1oz copper that is on a single-sided 1.6mm FR-4 PCB; device is measured under still air conditions whilst operating in steady-state.
 - Same as note 6, except mounted on 15mm x 15mm 1oz copper.
 - Same as note 6, whilst operating at $V_{IN} = 48\text{V}$ and 13V output current is zero. Refer to Safe Operating Area for other Input Voltages.
 - Same as note 6, whilst operating at $V_{IN} = 48\text{V}$ and 5V output current is zero. Refer to Safe Operating Area for other Input Voltages.
 - Same as note 6, except measured with a single pulse width = 100 μs , $V_{IN} = 48\text{V}$ and 13V output current is zero. This is limited by the absolute maximum I_{OM} rating.
 - Same as note 6, except measured with a single pulse width = 100 μs , $V_{IN} = 48\text{V}$ and 5V output current is zero.
 - Same as note 6, except measured with a single pulse width = 10ms, $V_{IN} = 48\text{V}$ and 13V output current is zero. This is limited by the absolute maximum I_{OM} rating.
 - Same as note 6, except measured with a single pulse width = 10ms, $V_{IN} = 48\text{V}$ and 5V output current is zero.
 - $R_{\theta JL}$ = Thermal resistance from junction to solder-point (on the exposed V_{IN} pad).
 - $R_{\theta JC}$ = Thermal resistance from junction to the top of case.
 - Refer to JEDEC specification JESD22-A114 and JESD22-A115.

Thermal Characteristics and Derating Information



Electrical Characteristics (Voltage relative to GND, @ $T_A = +25^\circ\text{C}$, unless otherwise specified.)

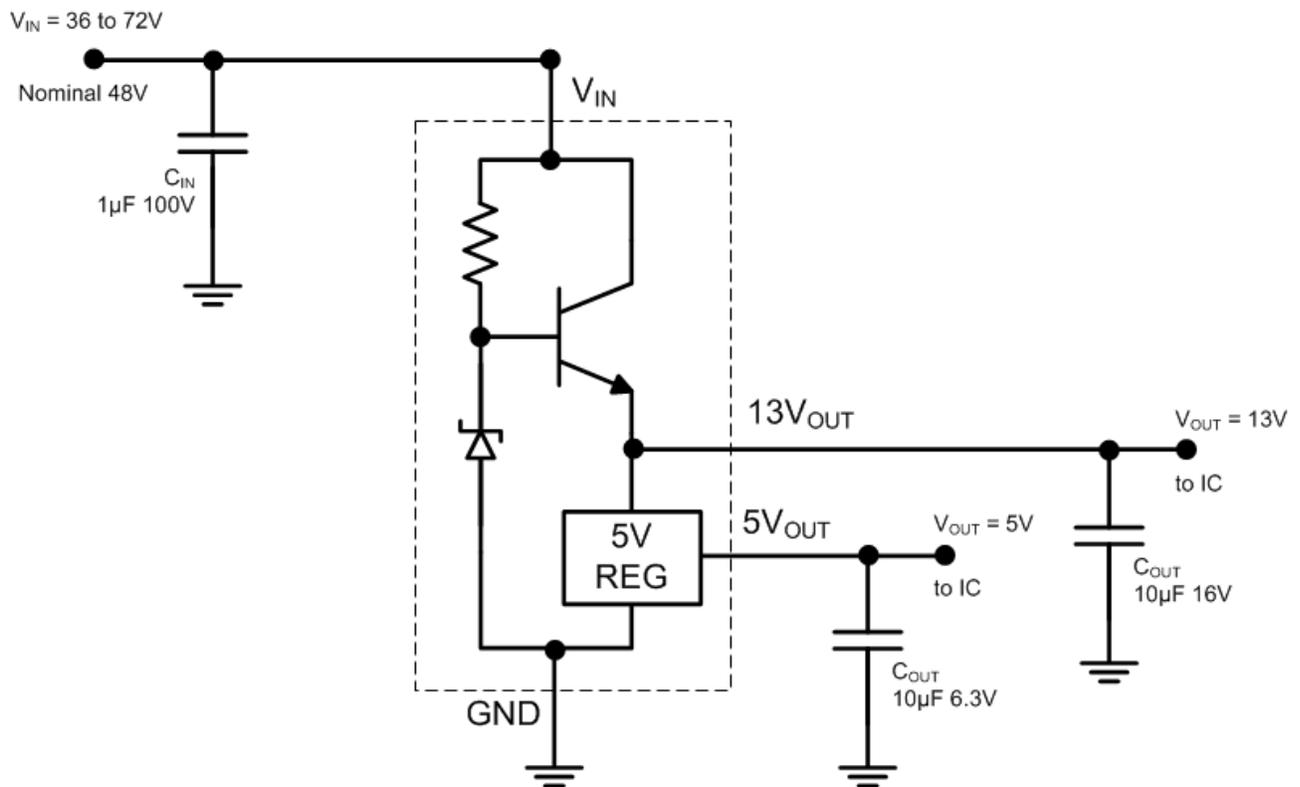
Characteristic	Symbol	Min	Typ	Max	Unit	Test Condition
Minimum Value of Input Voltage Required to Maintain Line Regulation	$V_{IN(MIN)}$	18	—	—	V	—
5V Output						
Output Voltage (Note 16)	$5V_{OUT}$	4.9	5.0	5.1	V	$V_{IN} = 48\text{V}$, $5I_{OUT} = 15\text{mA}$
Line Regulation (Notes 16 & 17)	$\Delta 5V_{OUT}$	-10	2	10	mV	$V_{IN} = 18$ to 72V , $5I_{OUT} = 15\text{mA}$
Average Temperature Coefficient	$\Delta 5V_{OUT}/\Delta T$	—	0.44	0.7	mV/ $^\circ\text{C}$	$T_J = -55^\circ\text{C}$ to $+125^\circ\text{C}$ $V_{IN} = 48\text{V}$, $5I_{OUT} = 15\text{mA}$
Load Regulation (Notes 16 & 17)	$\Delta 5V_{OUT}$	—	20	50	mV	$5I_{OUT} = 0.1$ to 50mA , $V_{IN} = 48\text{V}$
Power Supply Rejection Ratio	$\Delta V_{IN}/\Delta 5V_{OUT}$	—	57	—	dB	$C_{OUT} = 100\text{nF}$, $5I_{OUT} = 15\text{mA}$, $5V_{OUT} = 5\text{V}$, $V_{IN} = 18$ to 100V , $f = 100\text{Hz}$
13V Output						
Output Voltage (Note 16)	$13V_{OUT}$	11.7	13	14.3	V	$V_{IN} = 48\text{V}$, $13I_{OUT} = 15\text{mA}$
Line Regulation (Notes 16 & 17)	$\Delta 13V_{OUT}$	—	390	900	mV	$V_{IN} = 18$ to 72V , $5I_{OUT} = 15\text{mA}$
Temperature Coefficient	$\Delta 13V_{OUT}/\Delta T$	—	10	—	mV/ $^\circ\text{C}$	$T_J = -40^\circ\text{C}$ to $+125^\circ\text{C}$ $V_{IN} = 48\text{V}$, $13I_{OUT} = 15\text{mA}$
Load Regulation (Notes 16 & 18)	$\Delta 13V_{OUT}$	-500 -600	-320 -360	—	mV	$13I_{OUT} = 0.1$ to 30mA , $V_{IN} = 48\text{V}$ $13I_{OUT} = 0.1$ to 100mA , $V_{IN} = 48\text{V}$
Power Supply Rejection Ratio	$\Delta V_{IN}/\Delta 13V_{OUT}$	—	45	—	dB	$C_{OUT} = 100\text{nF}$, $13I_{OUT} = 15\text{mA}$, $13V_{OUT} = 13\text{V}$, $V_{IN} = 18$ to 100V , $f = 100\text{Hz}$
Quiescent Current (Note 16)	I_Q	—	300 650	400 780	μA	$V_{IN} = 48\text{V}$, $13I_{OUT} = 10\mu\text{A}$ $V_{IN} = 100\text{V}$, $13I_{OUT} = 10\mu\text{A}$

- Notes:
- 16. Measured under pulsed conditions. Pulse width $\leq 300\mu\text{s}$. Duty cycle $\leq 2\%$.
 - 17. Line regulation $\Delta V_{OUT} = V_{OUT}(@ V_{IN} = 72\text{V}) - V_{OUT}(@ V_{IN} = 18\text{V})$
 - 18. Load regulation $\Delta 5V_{OUT} = V_{OUT}(@ I_{OUT} = 50\text{mA}) - V_{OUT}(@ I_{OUT} = 0\text{mA})$
 $\Delta 13V_{OUT} = V_{OUT}(@ I_{OUT} = 30\text{mA}) - V_{OUT}(@ I_{OUT} = 0.1\text{mA})$

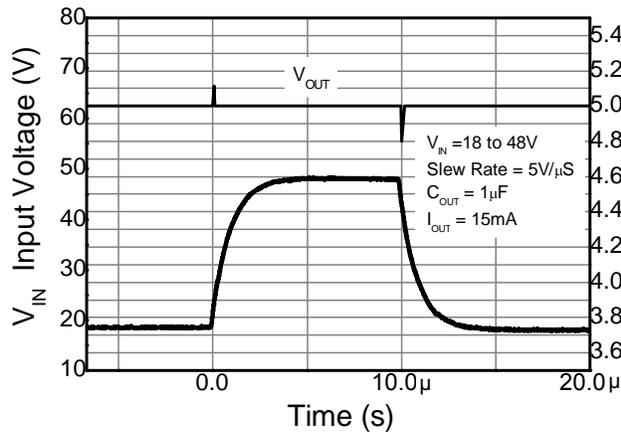
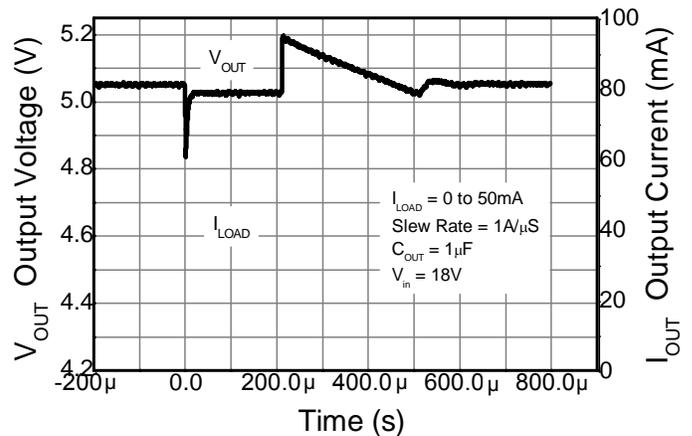
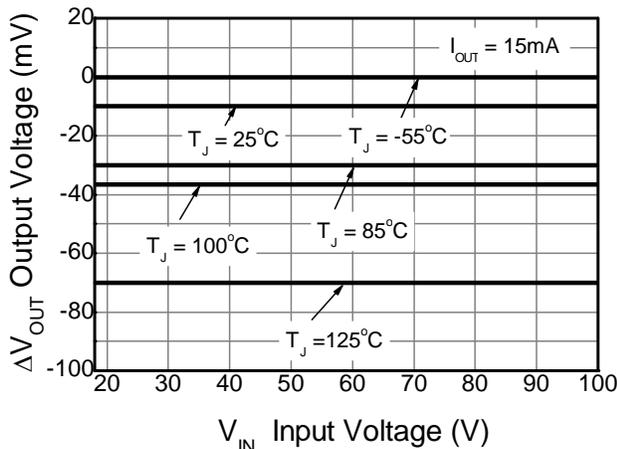
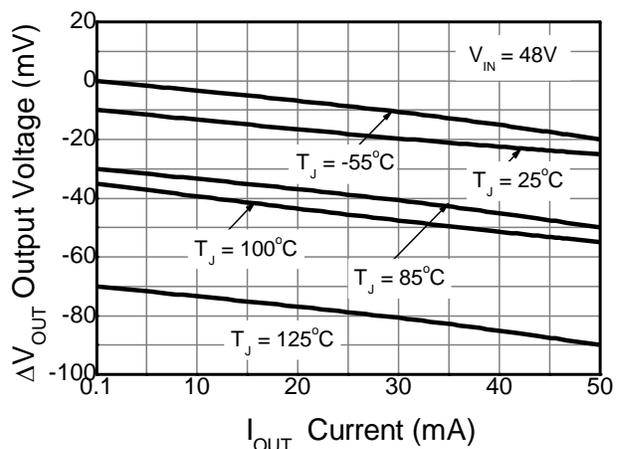
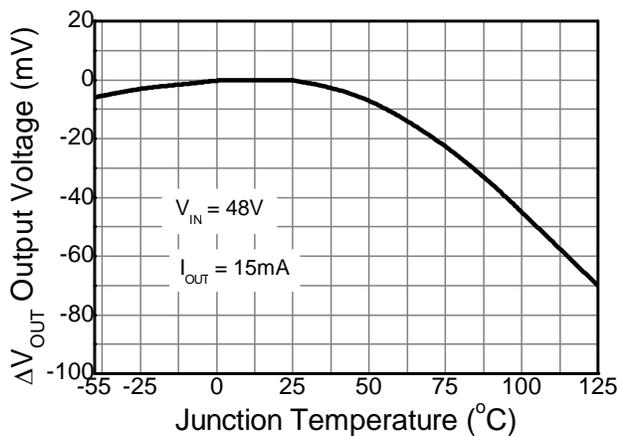
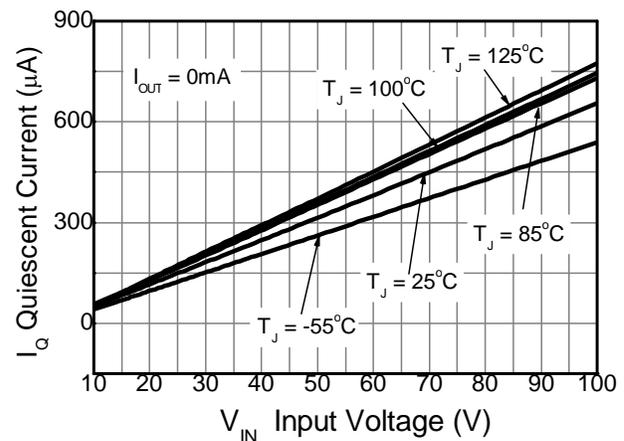
Pin Functions

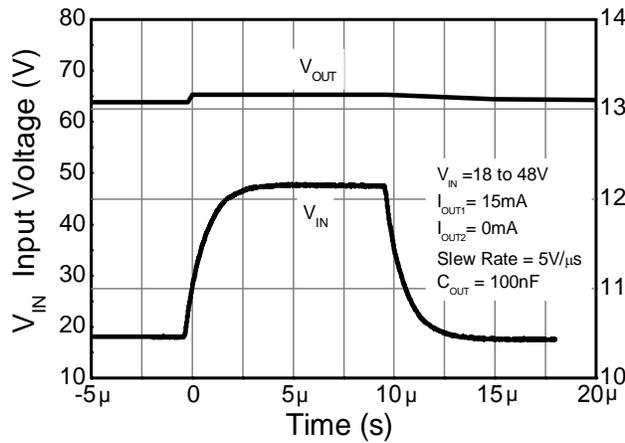
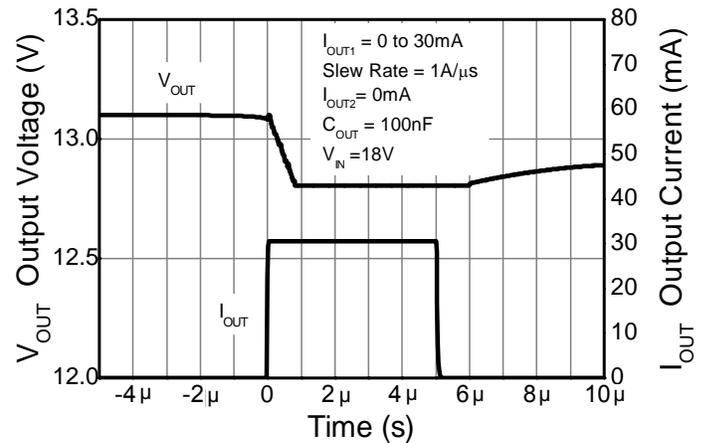
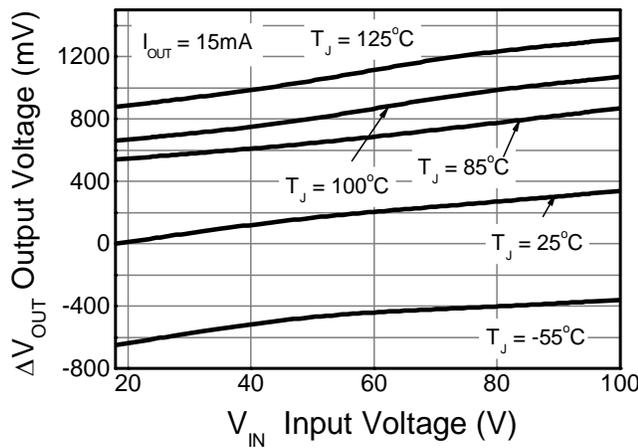
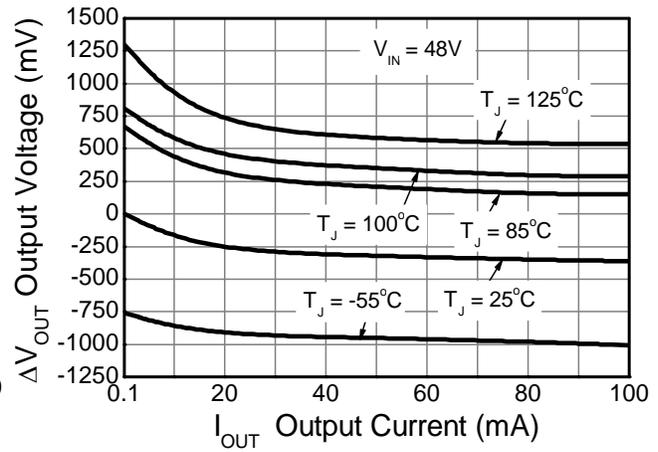
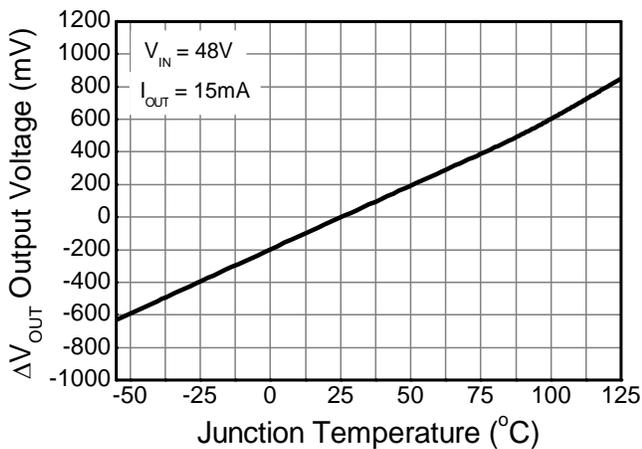
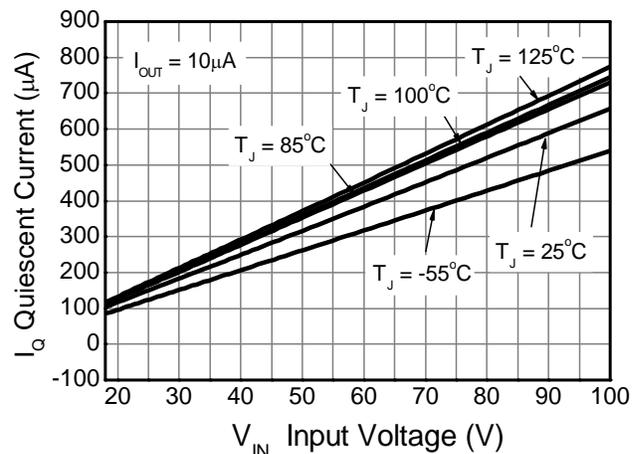
Pin Name	Pin Function	Notes
V_{IN}	Input Supply	To maintain output regulation the input voltage can vary from 18 to 100V with respect to the GND pin. It is recommended to connect a 1μF capacitor to GND.
GND	Power Ground	This pin should be tied to the system ground.
5V_{OUT}	5V Output	Outputs a regulated 5V when drawing between 0.1 to 50mA current. It is recommended to connect a ≥100nF capacitor to GND to minimize the noise on the regulated output.
13V_{OUT}	13V Output	Outputs a regulated 13V when drawing between 0.1 to 100mA current. It is recommended to connect a ≥100nF capacitor to GND to minimize the noise on the regulated output.

Typical Application Circuit

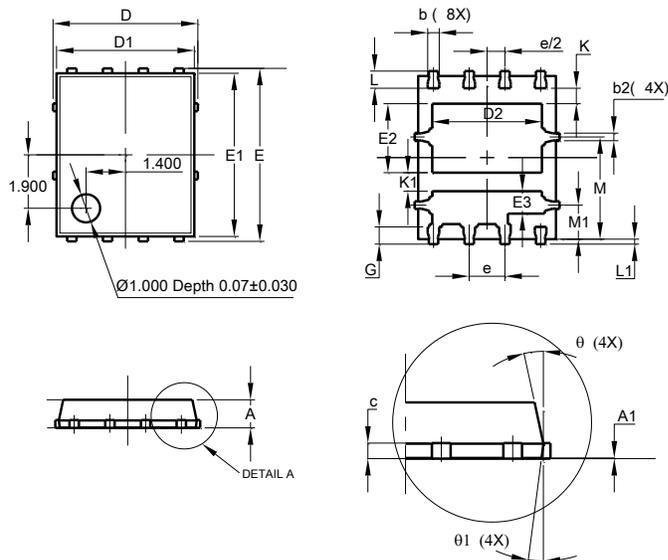


Example of a 5V and 13V regulated supply from a nominal 48V for powering two Controller IC's.

5V_{OUT} Typical Electrical Characteristics (@T_A = +25°C, unless otherwise specified.)

Line Transient Response

Load Transient Response

Line Regulation (Note 15)

Load Regulation (Note 16)

Temperature Coefficient (Note 17)

Quiescent Current

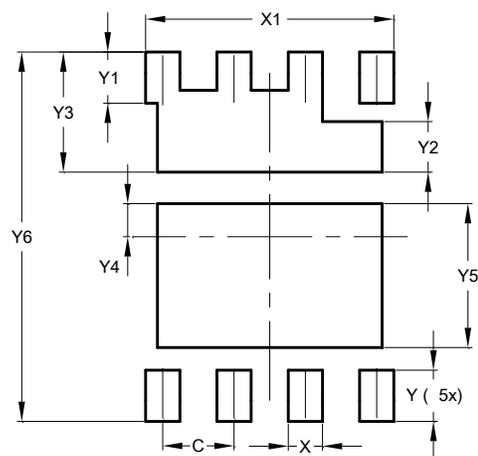
13V_{OUT} Typical Electrical Characteristics (Cont.) (@T_A = +25°C, unless otherwise specified.)

Line Transient Response

Load Transient Response

Line Regulation (Note 15)

Load Regulation (Note 16)

Temperature Coefficient (Note 17)

Quiescent Current

Package Outline Dimensions

PowerDI5060-8 (Type B)


PowerDI5060-8 (Type B)			
Dim	Min	Max	Typ
A	0.90	1.10	1.00
A1	0.00	0.05	—
b	0.33	0.51	0.41
b2	0.20	0.40	0.273
c	0.230	0.330	0.273
D	5.15 BSC		
D1	4.70	5.10	4.90
D2	3.50	4.40	3.90
E	6.15 BSC		
E1	5.60	6.00	5.80
E2	2.25	2.65	2.45
E3	0.595	0.995	0.795
e	1.27 BSC		
G	0.51	0.71	0.61
K	0.51	—	—
K1	0.51	—	—
L	0.51	0.71	0.61
L1	0.05	0.20	0.175
M	3.235	4.035	3.635
M1	1.00	1.40	1.21
θ1	10°	12°	11°
θ2	6°	8°	7°
All Dimensions in mm			

Suggested Pad Layout

PowerDI5060-8 (Type B)


Dimensions	Value (in mm)
C	1.270
X	0.610
X1	4.420
Y	0.910
Y1	0.910
Y2	0.895
Y3	2.130
Y4	0.585
Y5	2.550
Y6	6.550