YOUSHANG SEMICONDUCTOR

设计研发新型功率器件

各类小信号开关

中低压及高压大电流等场效应管

0755-83047638
ysbdt@szyoushang.cn
www.szyoushang.cn

企业微信二维码　企业QQ二维码

Product Summary

BV_{DSS}	$R_{DS(ON)}$ Max	I_D Max T_C = +25°C
30V	3.2mΩ @ V_{GS} = 10V	100A
	5.5mΩ @ V_{GS} = 4.5V	85A

Features and Benefits

- Low $R_{DS(ON)}$ – Ensures On-State Losses are Minimized
- Excellent $Q_{GD} \times R_{DS(ON)}$ Product (FOM)
- Advanced Technology for DC-DC Converters
- Small Form Factor Thermally Efficient Package Enables Higher Density End Products
- Occupies Just 33% of the Board Area Occupied by SO-8 Enabling Smaller End Product
- 100% Unclamped Inductive Switching, Test in Production – Ensures More Reliable And Robust End Application

Description and Applications

This MOSFET is designed to meet the stringent requirements of automotive applications. It is qualified to AEC-Q101, supported by a PPAP and is ideal for use in:

- Backlighting
- Power-management functions
- DC-DC converters

Mechanical Data

- Package: PowerDI®3333-8
- Package Material: Molded Plastic, "Green" Molding Compound. UL Flammability Classification Rating 94V-0
- Moisture Sensitivity: Level 1 per J-STD-020
- Terminal Connections Indicator: See Diagram
- Terminal Finish – Matte Tin Annealed over Copper Leadframe. Solderable per MIL-STD-202, Method 208 e3
- Weight: 0.008 grams (Approximate)

PowerDI3333-8



Top View



Bottom View



Top View
Internal Schematic



Equivalent Circuit

Maximum Ratings (@T_A = +25°C, unless otherwise specified.)

Characteristic		Symbol	Value	Unit
Drain-Source Voltage		V_{DSS}	30	V
Gate-Source Voltage		V_{GSS}	±20	V
Continuous Drain Current (Note 6) V_{GS} = 10V	T_C = +25°C T_C = +70°C	I_D	100 90	A
Continuous Drain Current (Note 5) V_{GS} = 10V	T_A = +25°C T_A = +70°C	I_D	22 18	A
Maximum Continuous Body Diode Forward Current (Note 5)		I_S	3	A
Pulsed Drain Current (10μs Pulse, Duty Cycle = 1%)		I_{DM}	100	A
Avalanche Current, L=1mH		I_{AS}	16	A
Avalanche Energy, L=1mH		E_{AS}	250	mJ

Thermal Characteristics

Characteristic		Symbol	Value	Unit
Total Power Dissipation (Note 5)	T_A = +25°C	P_D	2.4	W
Thermal Resistance, Junction to Ambient (Note 5)		$R_{\theta JA}$	52	°C/W
Total Power Dissipation (Note 6)	T_C = +25°C	P_D	62	W
Thermal Resistance, Junction to Case (Note 6)		$R_{\theta JC}$	2	°C/W
Operating and Storage Temperature Range		T_J, T_{STG}	-55 to +150	°C

Notes: 5. Device mounted on FR-4 substrate PC board, 2oz copper, with thermal bias to bottom layer 1-inch square copper plate.
6. Thermal resistance from junction to soldering point (on the exposed drain pad).

Electrical Characteristics (@T_A = +25°C, unless otherwise specified.)

Characteristic	Symbol	Min	Typ	Max	Unit	Test Condition
OFF CHARACTERISTICS (Note 7)						
Drain-Source Breakdown Voltage	BV_{DSS}	30	—	—	V	V_{GS} = 0V, I_D = 1mA
Zero Gate Voltage Drain Current	I_{DSS}	—	—	1	μA	V_{DS} = 24V, V_{GS} = 0V
Gate-Source Leakage	I_{GSS}	—	—	±100	nA	V_{GS} = +20V, V_{DS} = 0V V_{GS} = -16V, V_{DS} = 0V
ON CHARACTERISTICS (Note 7)						
Gate Threshold Voltage	$V_{GS(TH)}$	1	—	3	V	V_{DS} = V_{GS}, I_D = 250μA
Static Drain-Source On-Resistance	$R_{DS(ON)}$	—	2.4	3.2	mΩ	V_{GS} = 10V, I_D = 20A
		—	4	5.5		V_{GS} = 4.5V, I_D = 15A
Diode Forward Voltage	V_{SD}	—	0.75	1	V	V_{GS} = 0V, I_S = 10A
DYNAMIC CHARACTERISTICS (Note 8)						
Input Capacitance	C_{ISS}	—	2,370	—	pF	V_{DS} = 15V, V_{GS} = 0V, f = 1MHz
Output Capacitance	C_{OSS}	—	1,360	—		
Reverse Transfer Capacitance	C_{RSS}	—	240	—		
Gate Resistance	R_G	—	0.6	—	Ω	V_{DS} = 0V, V_{GS} = 0V, f = 1MHz
Total Gate Charge (V_{GS} = 4.5V)	Q_G	—	20	—	nC	V_{DS} = 15V, I_D = 20A
Total Gate Charge (V_{GS} = 10V)	Q_G	—	44	—		
Gate-Source Charge	Q_{GS}	—	7	—		
Gate-Drain Charge	Q_{GD}	—	8	—		
Turn-On Delay Time	$t_{D(ON)}$	—	6.2	—	ns	V_{DD} = 15V, V_{GS} = 10V, R_L = 0.75Ω, R_G = 3Ω, I_D = 20A
Turn-On Rise Time	t_R	—	4.3	—		
Turn-Off Delay Time	$t_{D(OFF)}$	—	21	—		
Turn-Off Fall Time	t_F	—	8	—		
Body Diode Reverse Recovery Time	t_{RR}	—	25	—	ns	I_F = 15A, di/dt = 500A/μs
Body Diode Reverse Recovery Charge	Q_{RR}	—	37	—	nC	

Notes: 7. Short duration pulse test used to minimize self-heating effect.
8. Guaranteed by design. Not subject to product testing.

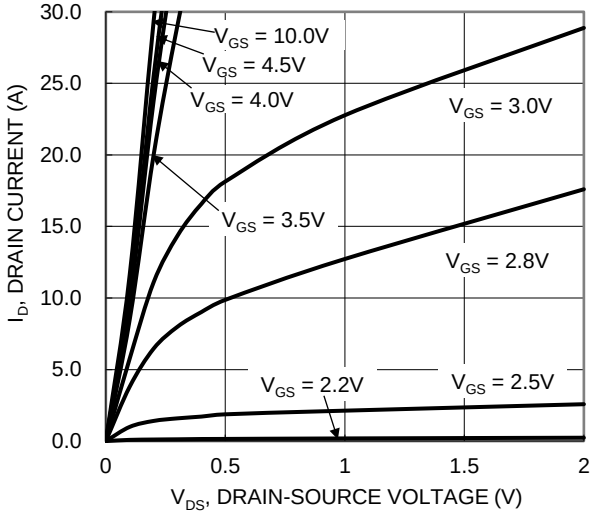

Figure 1. Typical Output Characteristic

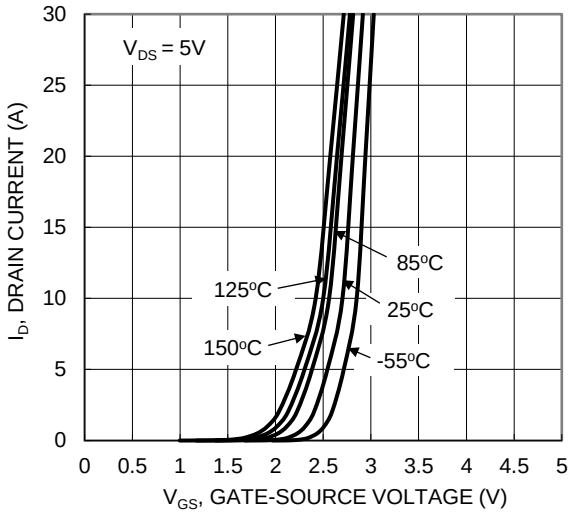

Figure 2. Typical Transfer Characteristic

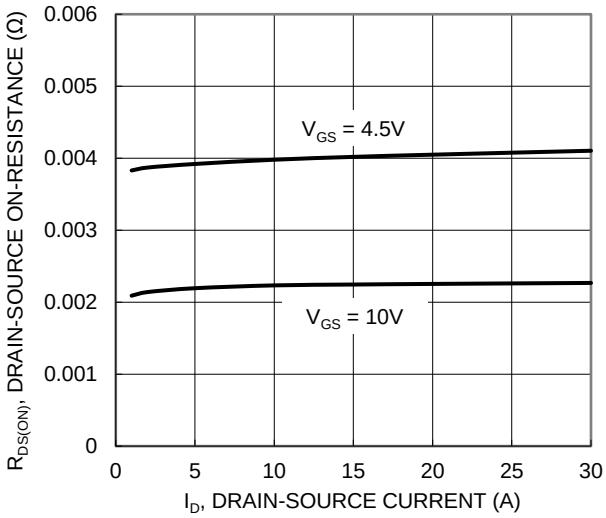

Figure 3. Typical On-Resistance vs. Drain Current and Gate Voltage

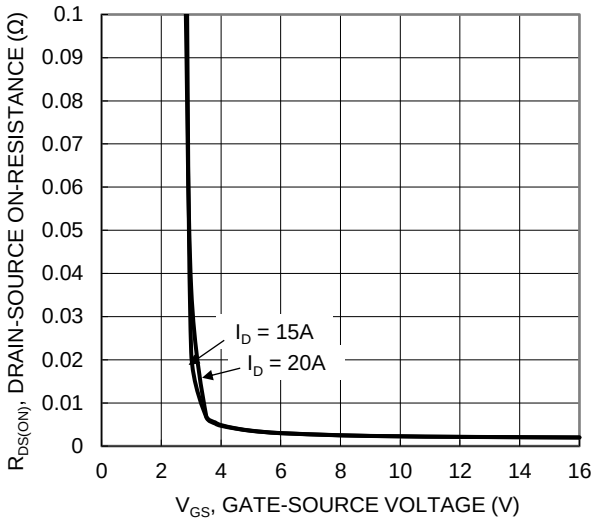

Figure 4. Typical Transfer Characteristic

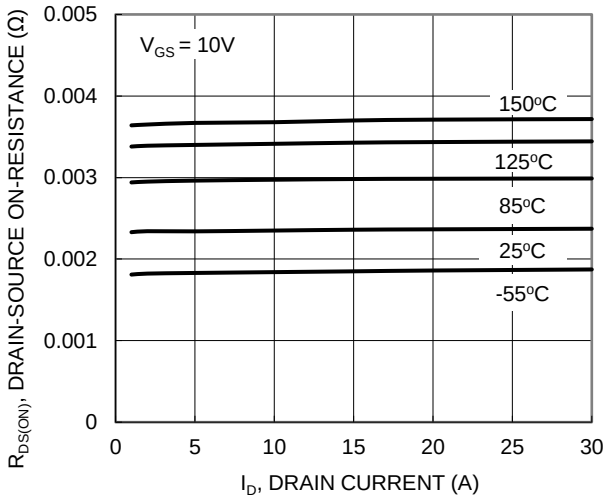

Figure 5. Typical On-Resistance vs. Drain Current and Junction Temperature

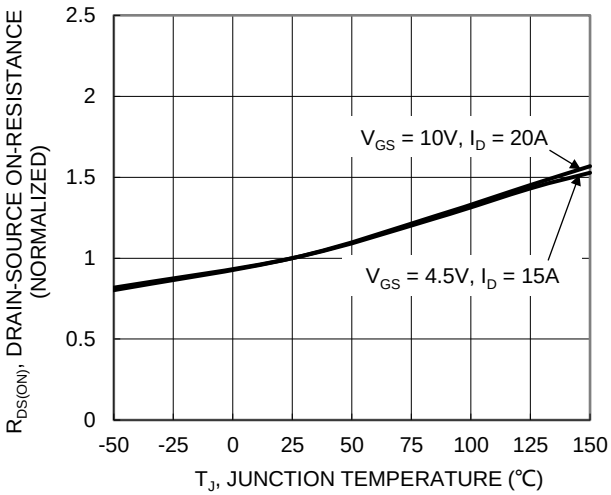

Figure 6. On-Resistance Variation with Junction Temperature

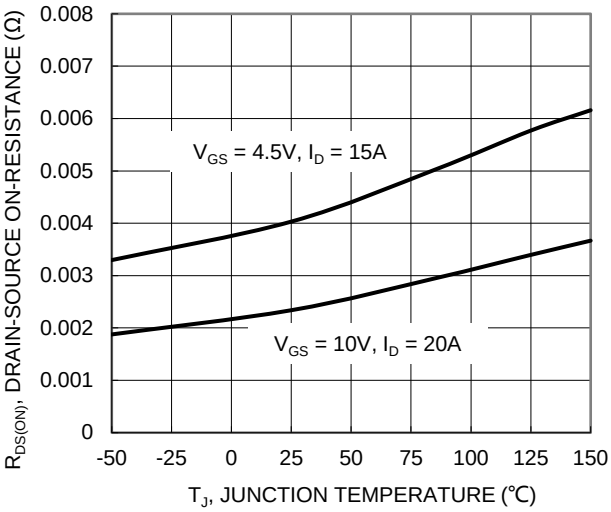

Figure 7. On-Resistance Variation with Junction Temperature

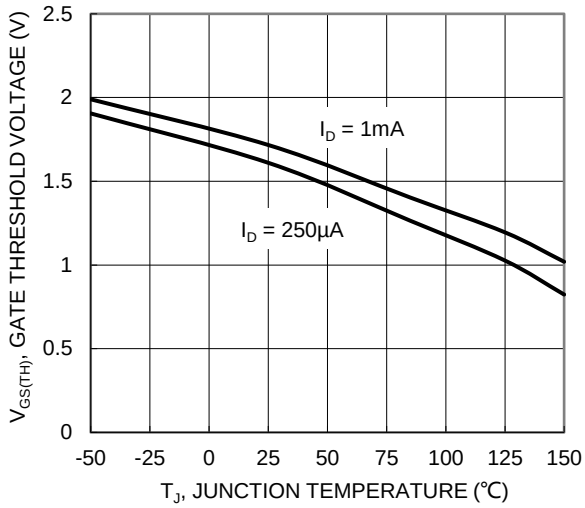

Figure 8. Gate Threshold Variation vs. Junction Temperature

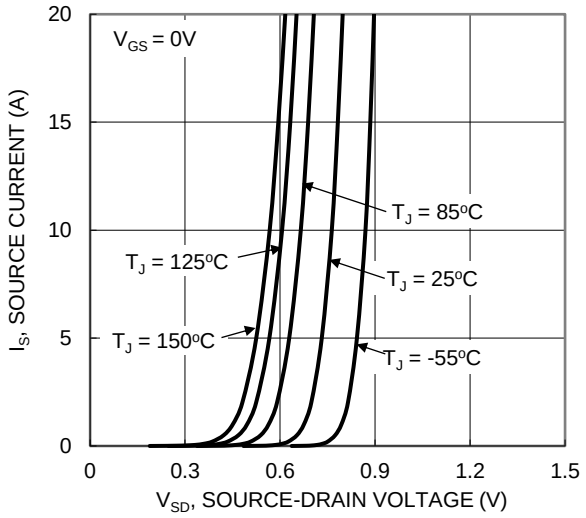

Figure 9. Diode Forward Voltage vs. Current

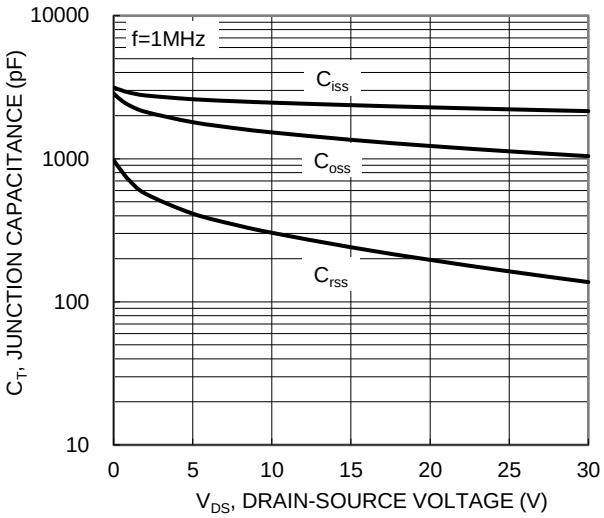

Figure 10. Typical Junction Capacitance

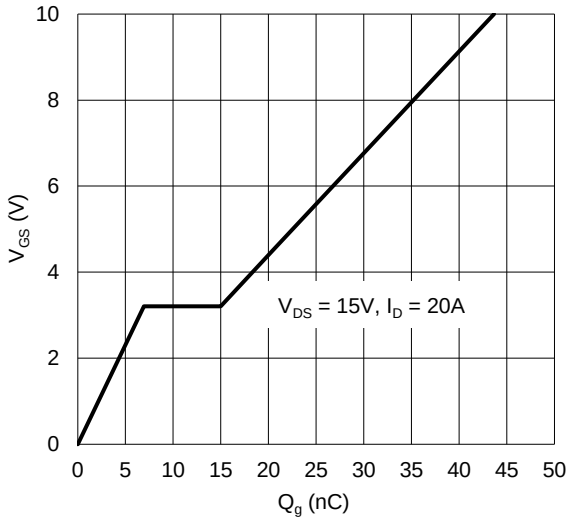

Figure 11. Gate Charge

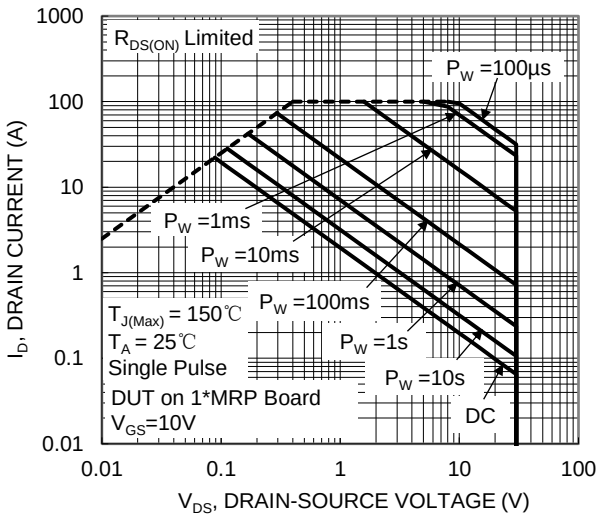

Figure 12. SOA, Safe Operation Area

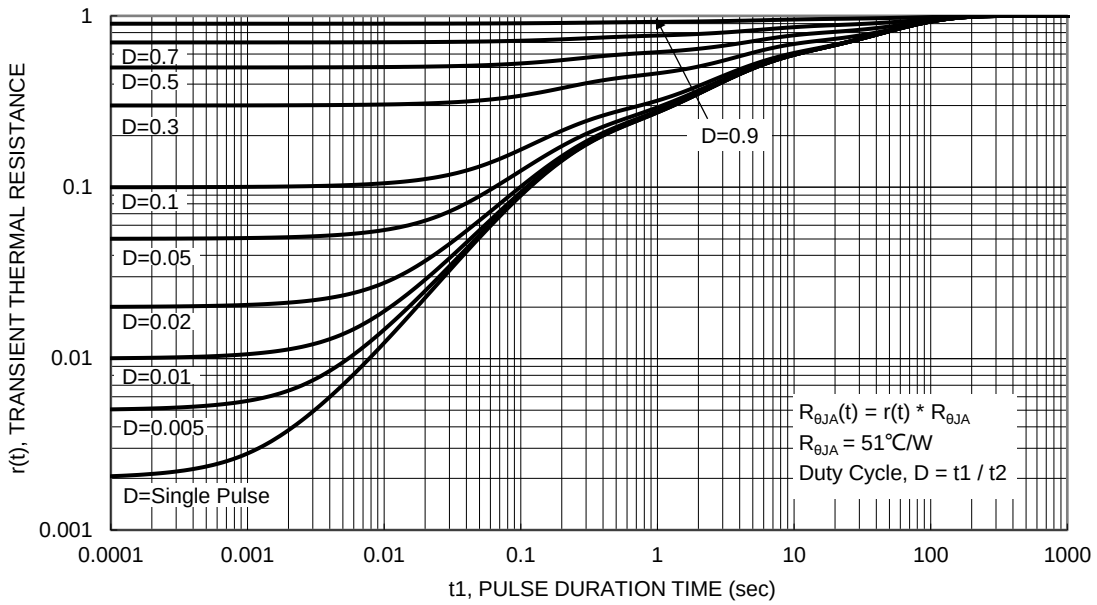

Figure 13. Transient Thermal Resistance

Package Outline Dimensions

PowerDI3333-8

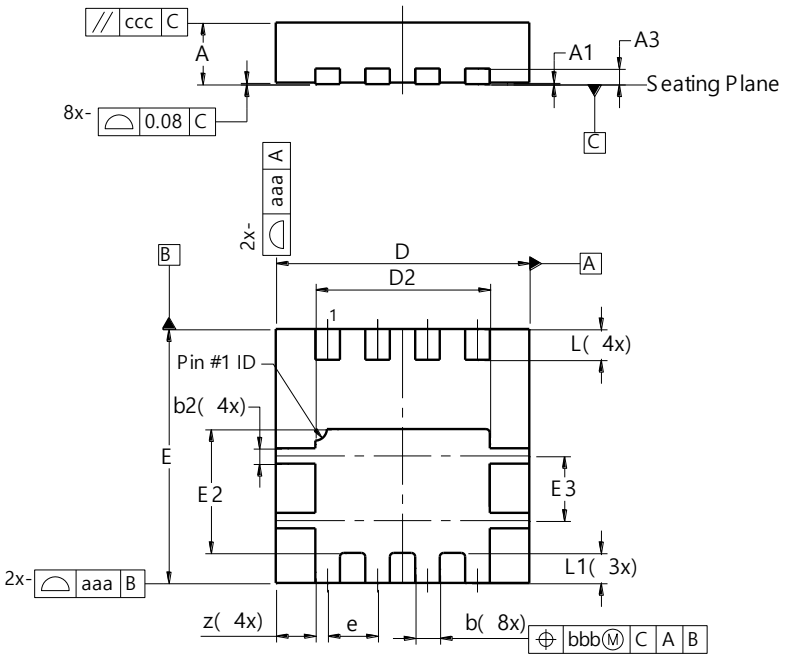

PowerDI3333-8			
Dim	**Min**	**Max**	**Typ**
A	0.75	0.85	0.80
A1	0.00	0.05	0.02
A3	–	–	0.203
b	0.27	0.37	0.32
b2	–	–	0.20
D	3.25	3.35	3.30
D2	2.22	2.32	2.27
E	3.25	3.35	3.30
E2	1.56	1.66	1.61
E3	0.79	0.89	0.84
e	–	–	0.65
L	0.35	0.45	0.40
L1	–	–	0.39
z	–	–	0.515
aaa	0.25		
bbb	0.10		
ccc	0.10		
All Dimensions in mm			

Suggested Pad Layout

PowerDI3333-8

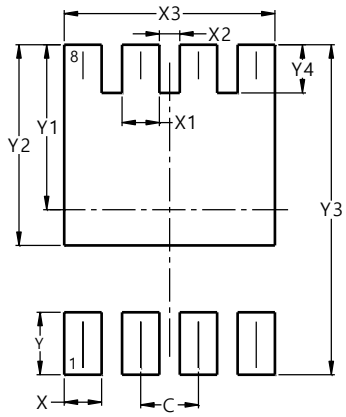

Dimensions	Value (in mm)
C	0.650
X	0.420
X1	0.420
X2	0.230
X3	2.370
Y	0.700
Y1	1.850
Y2	2.250
Y3	3.700
Y4	0.540