



YOUSHANG SEMICONDUCTOR

设计研发新型功率器件

各类小信号开关

中低压及高压大电流等场效应管

0755-83047638

ysbdt@szyoushang.cn

www.szyoushang.cn



企业微信二维码



企业QQ二维码

Product Summary

BV_{DSS}	$R_{DS(ON)}$ Max	I_D $T_C = +25^\circ C$ (Note 9)
60V	3.4m Ω @ $V_{GS} = 10V$	100A

Description

This new generation MOSFET features low on-resistance and fast switching, making it ideal for high efficiency power management applications.


Applications

- Engine Management Systems
- Body Control Electronics
- DC-DC Converters

Features



- Rated to +175°C – Ideal for High Ambient Temperature Environments
- 100% Unclamped Inductive Switching – Ensures More Reliable and Robust End Application
- Low $R_{DS(ON)}$ – Minimizes Power Losses
- Low Q_g – Minimizes Switching Losses

Mechanical Data

- Case: TO263AB
- Case Material: Molded Plastic, "Green" Molding Compound. UL Flammability Classification Rating 94V-0
- Moisture Sensitivity: Level 1 per J-STD-020
- Terminal Finish - Matte Tin Annealed over Copper Leadframe. Solderable per MIL-STD-202, Method 208 
- Weight: 1.7 grams (Approximate)



Top View



Internal Schematic

Maximum Ratings (@ $T_A = +25^\circ\text{C}$, unless otherwise specified.)

Characteristic	Symbol	Value	Unit
Drain-Source Voltage	V_{DSS}	60	V
Gate-Source Voltage	V_{GSS}	± 20	V
Continuous Drain Current (Note 6)	I_D	$T_C = +25^\circ\text{C}$ (Note 9)	100
		$T_C = +100^\circ\text{C}$	100
Maximum Continuous Body Diode Forward Current (Note 6)	I_S	100	A
Pulsed Drain Current (10 μs Pulse, Duty Cycle=1%)	I_{DM}	200	A
Avalanche Current, L=0.2mH	I_{AS}	45	A
Avalanche Energy, L=0.2mH	E_{AS}	200	mJ

Thermal Characteristics

Characteristic	Symbol	Value	Unit
Total Power Dissipation (Note 5)	P_D	4.7	W
Thermal Resistance, Junction to Ambient (Note 5)	$R_{\theta JA}$	32	$^\circ\text{C/W}$
Total Power Dissipation (Note 6)	P_D	136	W
Thermal Resistance, Junction to Case (Note 6)	$R_{\theta JC}$	1.1	$^\circ\text{C/W}$
Operating and Storage Temperature Range	T_J, T_{STG}	-55 to +175	$^\circ\text{C}$

Electrical Characteristics (@ $T_A = +25^\circ\text{C}$, unless otherwise specified.)

Characteristic	Symbol	Min	Typ	Max	Unit	Test Condition
OFF CHARACTERISTICS (Note 7)						
Drain-Source Breakdown Voltage	BV_{DSS}	60	—	—	V	$V_{GS} = 0V, I_D = 1mA$
Zero Gate Voltage Drain Current	I_{DSS}	—	—	1	μA	$V_{DS} = 48V, V_{GS} = 0V$
Gate-Source Leakage	I_{GSS}	—	—	± 100	nA	$V_{GS} = \pm 20V, V_{DS} = 0V$
ON CHARACTERISTICS (Note 7)						
Gate Threshold Voltage	$V_{GS(TH)}$	2	—	4	V	$V_{DS} = V_{GS}, I_D = 250\mu\text{A}$
Static Drain-Source On-Resistance	$R_{DS(ON)}$	—	2.9	3.4	m Ω	$V_{GS} = 10V, I_D = 100A$
Diode Forward Voltage	V_{SD}	—	—	1.3	V	$V_{GS} = 0V, I_S = 100A$
DYNAMIC CHARACTERISTICS (Note 8)						
Input Capacitance	C_{ISS}	—	4,556	—	pF	$V_{DS} = 30V, V_{GS} = 0V$ $f = 1MHz$
Output Capacitance	C_{OSS}	—	1,383	—		
Reverse Transfer Capacitance	C_{RSS}	—	105.2	—		
Gate Resistance	R_g	—	0.66	—	Ω	$V_{DS} = 0V, V_{GS} = 0V, f = 1MHz$
Total Gate Charge	Q_g	—	95.4	—	nC	$V_{DD} = 30V, I_D = 90A,$ $V_{GS} = 10V$
Gate-Source Charge	Q_{gs}	—	21.6	—		
Gate-Drain Charge	Q_{gd}	—	20.4	—		
Turn-On Delay Time	$t_{D(ON)}$	—	13.2	—	ns	$V_{DD} = 30V, V_{GS} = 10V,$ $I_D = 90A, R_G = 3.5\Omega$
Turn-On Rise Time	t_R	—	11.7	—		
Turn-Off Delay Time	$t_{D(OFF)}$	—	31	—		
Turn-Off Fall Time	t_F	—	12	—		
Reverse Recovery Time	t_{RR}	—	50.5	—	ns	$I_F = 50A, di/dt = 100A/\mu\text{s}$
Reverse Recovery Charge	Q_{RR}	—	80.8	—	nC	

- Notes:
- Device mounted on FR-4 substrate PC board, 2oz copper, with thermal bias to bottom layer 1-inch square copper plate.
 - Thermal resistance from junction to soldering point (on the exposed drain pad).
 - Short duration pulse test used to minimize self-heating effect.
 - Guaranteed by design. Not subject to product testing.
 - Package limited.

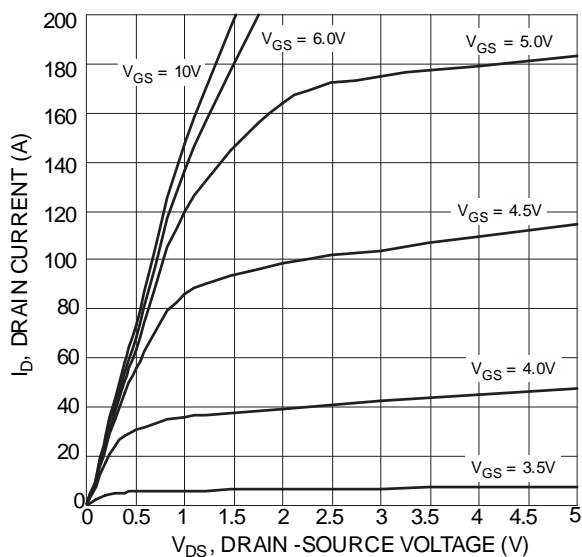


Figure 1 Typical Output Characteristics

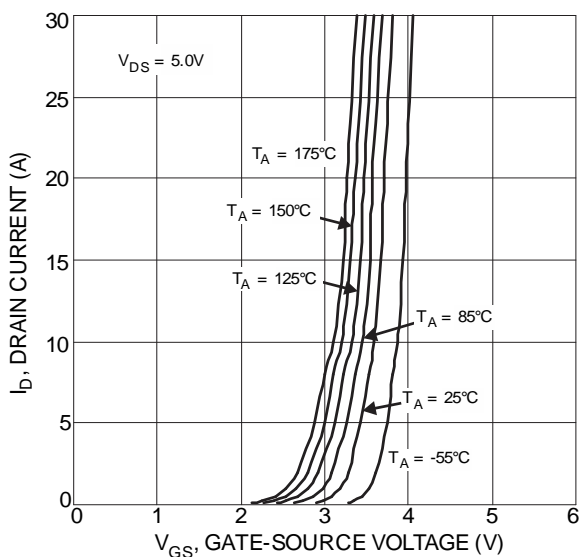


Figure 2 Typical Transfer Characteristics

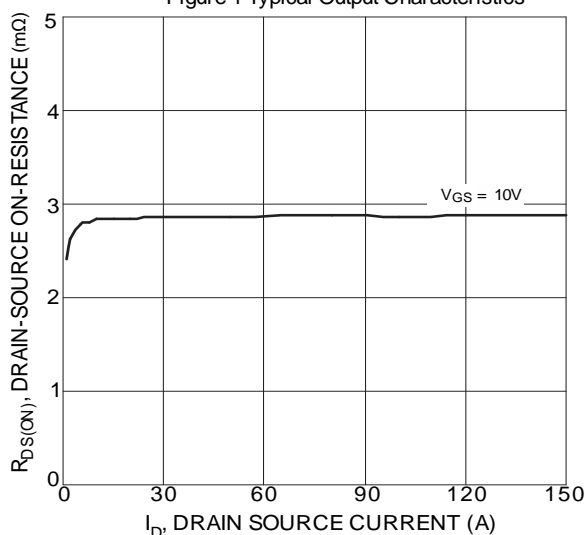


Figure 3 Typical On-Resistance vs. Drain Current and Gate Voltage

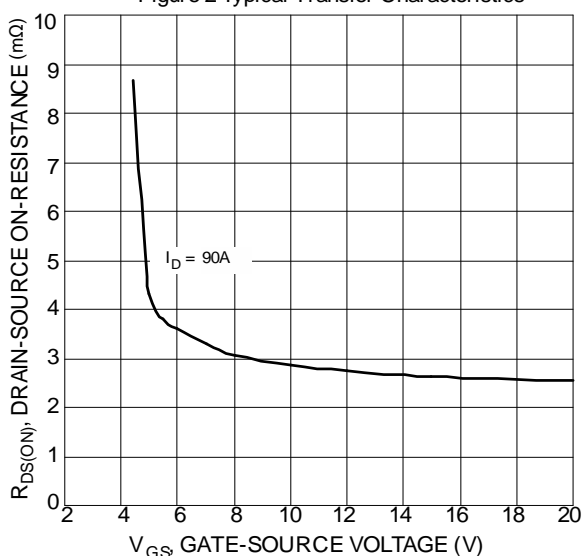


Figure 4 Typical Transfer Characteristic

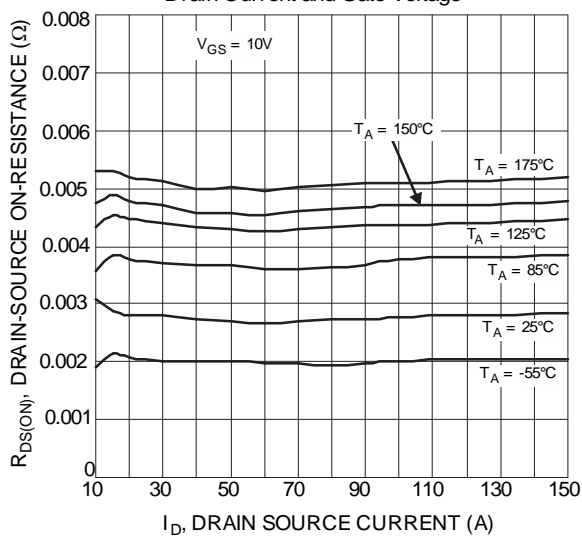


Figure 5 Typical On-Resistance vs. Drain Current and Temperature

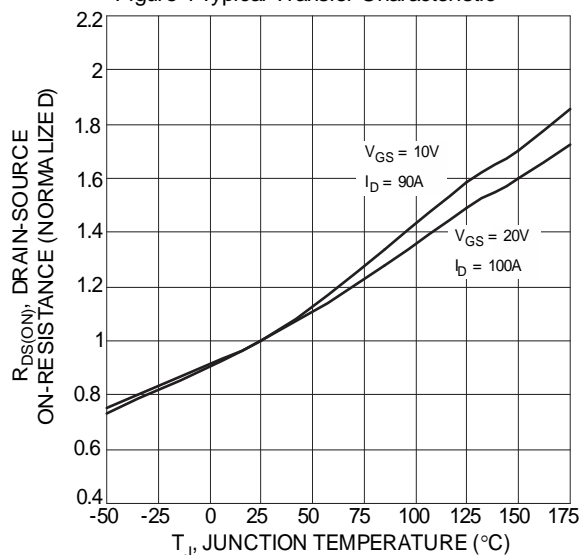


Figure 6 On-Resistance Variation with Temperature

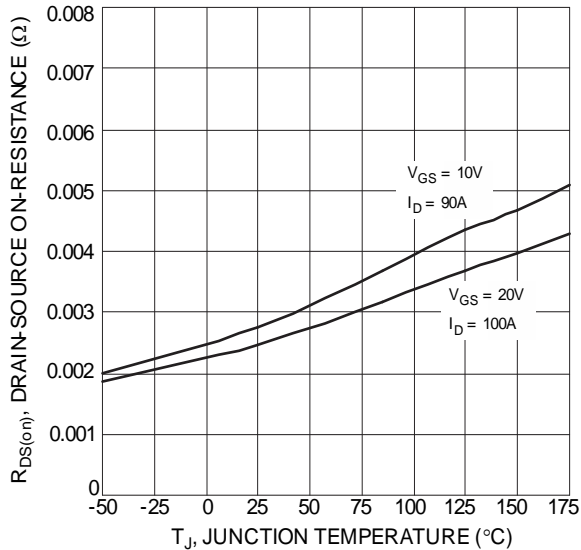


Figure 7 On-Resistance Variation with Temperature

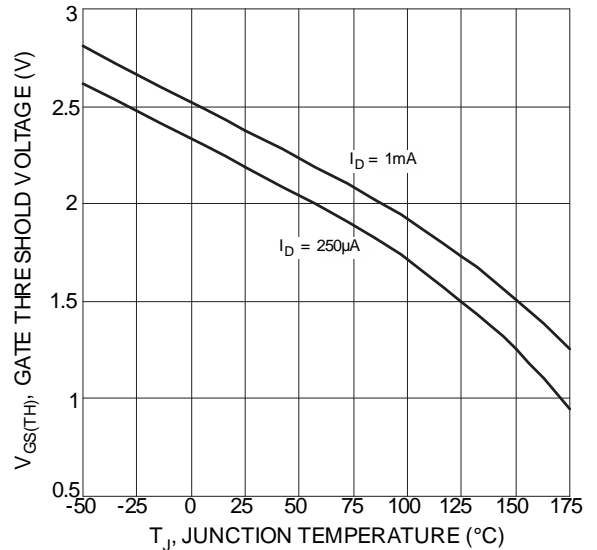


Figure 8 Gate Threshold Variation vs. Temperature

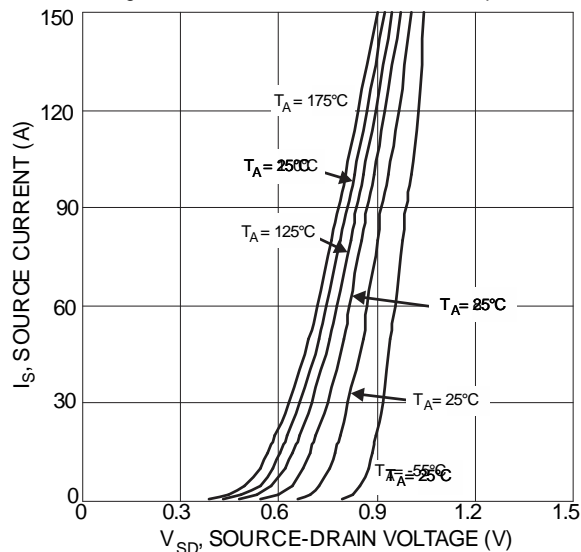


Figure 9 Diode Forward Voltage vs. Current

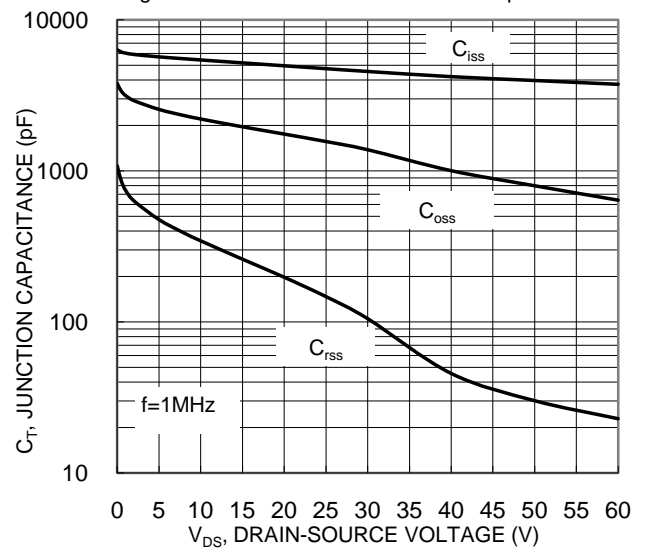


Figure 10. Typical Junction Capacitance

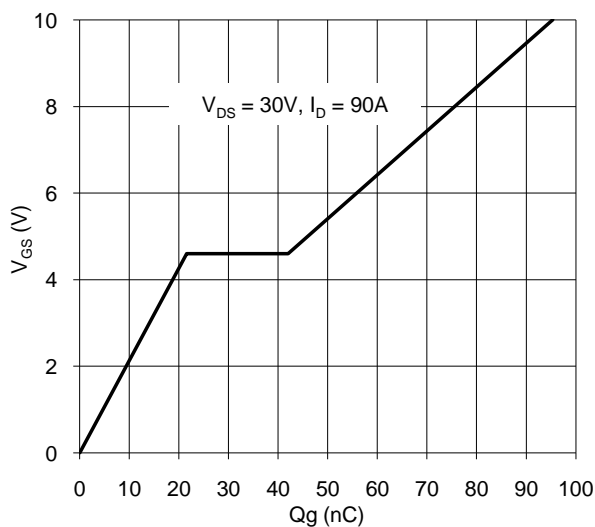


Figure 11. Gate Charge

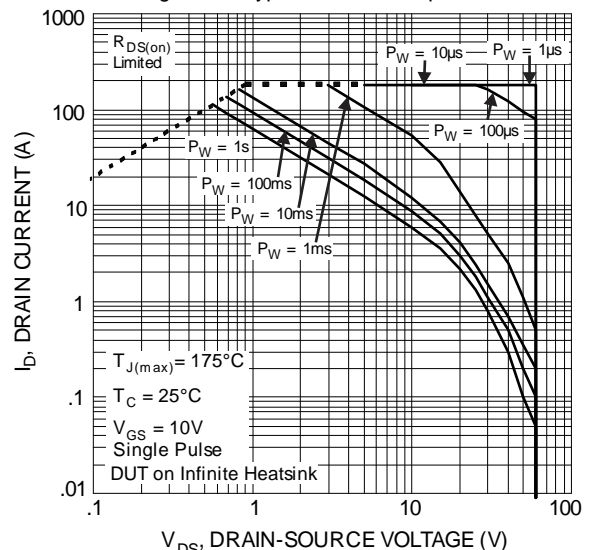


Figure 12 SOA, Safe Operation Area


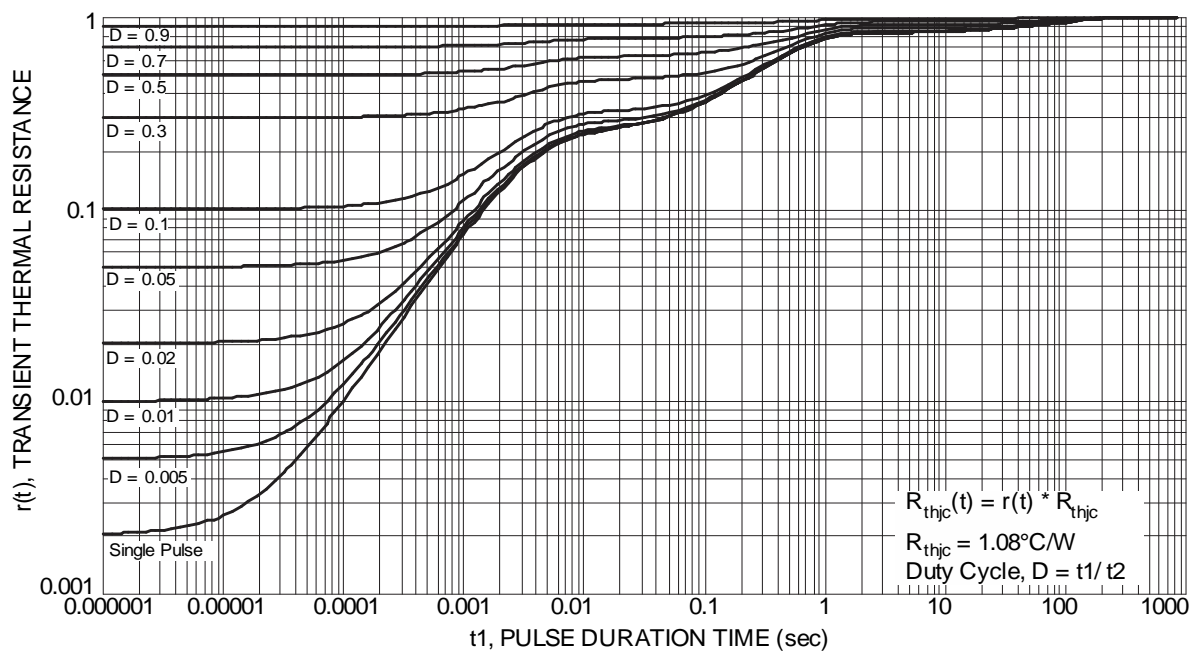


Figure 13 Transient Thermal Resistance

Package Outline Dimensions


TO263AB (D2PAK)

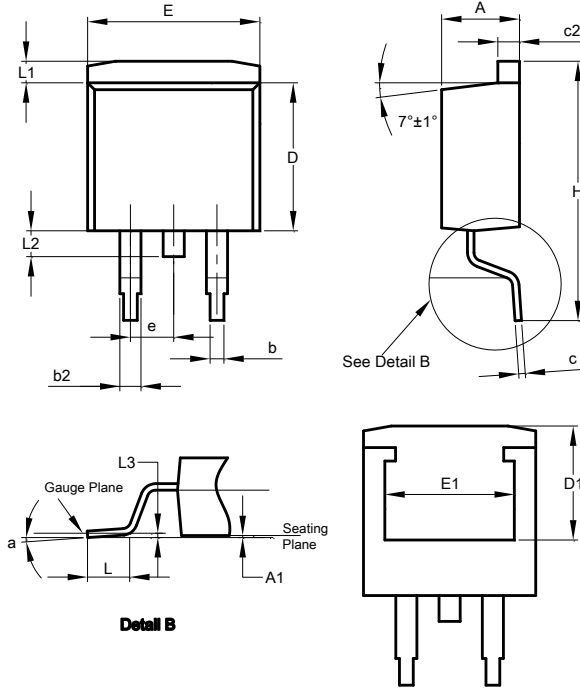

TO263AB (D2PAK)			
Dim	Min	Max	Typ
A	4.07	4.82	—
A1	0.00	0.25	—
b	0.51	0.99	—
b2	1.15	1.77	—
c	0.356	0.73	—
c2	1.143	1.65	—
D	8.39	9.65	—
D1	6.55	6.95	—
e	2.54 TYP		
E	9.66	10.66	—
E1	6.23	8.23	—
H	14.61	15.87	—
L	1.78	2.79	—
L1	—	1.67	—
L2	—	1.77	—
L3	—	—	0.254
a	0°	8°	—
All Dimensions in mm			

Suggested Pad Layout

TO263AB (D2PAK)

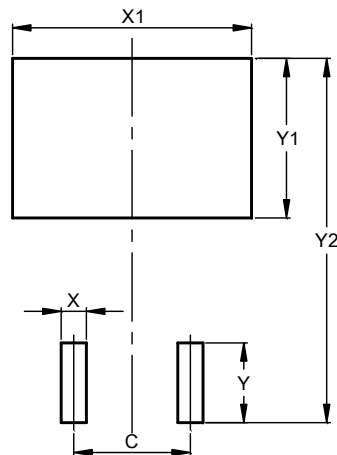

Dimensions	Value (in mm)
C	5.08
X	1.10
X1	10.41
Y	3.50
Y1	7.01
Y2	15.99