



YOUSHANG SEMICONDUCTOR

设计研发新型功率器件

各类小信号开关

中低压及高压大电流等场效应管

0755-83047638

ysbdt@szyoushang.cn

www.szyoushang.cn



企业微信二维码



企业QQ二维码

Features

- Epitaxial Planar Die Construction
- Built-In Biasing Resistors


Mechanical Data

- Case: SOT26
- Surface Mount Package
- Case Material: Molded Plastic, UL Flammability Classification Rating 94V-0
- Terminals: Finish – Matte Tin Plated Leads, Solderable per MIL-STD-202, Method 208 ③
- Weight: 0.016 grams (Approximate)


Part Number	R1	R2
NK-DCX124EK	22kΩ	22kΩ
NK-DCX144EK	47kΩ	47kΩ
NK-DCX114YK	10kΩ	47kΩ
NK-DCX123JK	2.2kΩ	47kΩ
NK-DCX114EK	10kΩ	10kΩ
NK-DCX115EK	100kΩ	100kΩ
NK-DCX143TK	4.7kΩ	—
NK-DCX114TK	10kΩ	—



SOT26



R1, R2 Device Schematic



R1 only Device Schematic

Maximum Ratings NPN Section @ $T_A = 25^\circ\text{C}$ unless otherwise specified

Characteristic		Symbol	Value	Unit
Supply Voltage		V_{CC}	50	V
Input Voltage	NK-DCX124EK	V_{IN}	-10 to +40	V
	NK-DCX144EK		-10 to +40	
	NK-DCX114YK		-6 to +40	
	NK-DCX123JK		-5 to +12	
	NK-DCX114EK		-10 to +40	
	NK-DCX115EK		-10 to +40	
	NK-DCX143TK		-5V max	
NK-DCX114TK	-5V max			
Output Current	NK-DCX124EK	I_O	30	mA
	NK-DCX144EK		30	
	NK-DCX114YK		70	
	NK-DCX123JK		100	
	NK-DCX114EK		50	
	NK-DCX115EK		20	
	NK-DCX143TK		100	
NK-DCX114TK	100			
Output Current	All	$I_{C(MAX)}$	100	mA

Thermal Characteristics NPN Section

Characteristic	Symbol	Value	Unit
Power Dissipation (Total) (Note 5)	P_D	300	mW
Thermal Resistance, Junction to Ambient Air (Note 5)	$R_{\theta JA}$	417	$^\circ\text{C/W}$
Operating and Storage Temperature Range	T_J, T_{STG}	-55 to +150	$^\circ\text{C}$

Maximum Ratings PNP Section @ $T_A = 25^\circ\text{C}$ unless otherwise specified

Characteristic		Symbol	Value	Unit
Supply Voltage		V_{CC}	50	V
Input Voltage	NK-DCX124EK	V_{IN}	+10 to -40	V
	NK-DCX144EK		+10 to -40	
	NK-DCX114YK		+6 to -40	
	NK-DCX123JK		+5 to -12	
	NK-DCX114EK		+10 to -40	
	NK-DCX115EK		+10 to -40	
	NK-DCX143TK		+5V max	
NK-DCX114TK	+5V max			
Output Current	NK-DCX124EK	I_O	-30	mA
	NK-DCX144EK		-30	
	NK-DCX114YK		-70	
	NK-DCX123JK		-100	
	NK-DCX114EK		-50	
	NK-DCX115EK		-20	
	NK-DCX143TK		-100	
NK-DCX114TK	-100			
Output Current	All	$I_{C(MAX)}$	-100	mA

Thermal Characteristics PNP Section

Characteristic	Symbol	Value	Unit
Power Dissipation (Total) (Note 5)	P_D	300	mW
Thermal Resistance, Junction to Ambient Air (Note 5)	$R_{\theta JA}$	417	$^\circ\text{C/W}$
Operating and Storage Temperature Range	T_J, T_{STG}	-55 to +150	$^\circ\text{C}$

Notes: 5. Mounted on FR-4 PC Board with minimum recommended pad layout.

Electrical Characteristics NPN Section (R1 only) @ $T_A = 25^\circ\text{C}$ unless otherwise specified

Characteristic (DDC143TK & DDC114TK only)	Symbol	Min	Typ	Max	Unit	Test Condition
Collector-Base Breakdown Voltage	BV_{CBO}	50	—	—	V	$I_C = 50\mu\text{A}$
Collector-Emitter Breakdown Voltage	BV_{CEO}	50	—	—	V	$I_C = 1\text{mA}$
Emitter-Base Breakdown Voltage	BV_{EBO}	5	—	—	V	$I_E = 50\mu\text{A}$
Collector Cut-Off Current	I_{CBO}	—	—	0.5	μA	$V_{CB} = 50\text{V}$
Emitter Cut-Off Current	I_{EBO}	—	—	0.5	μA	$V_{EB} = 4\text{V}$
Collector-Emitter Saturation Voltage	$V_{CE(sat)}$	—	—	0.3	V	$I_C/I_B = 2.5\text{mA} / 0.25\text{mA} - \text{NK-DCX143TK}$ $I_C/I_B = 1\text{mA} / 0.1\text{mA} - \text{NK-DCX114TK}$
DC Current Transfer Ratio	h_{FE}	100	250	600	—	$I_C = 1\text{mA}, V_{CE} = 5\text{V}$
Input Resistor (R_1) Tolerance	ΔR_1	-30	—	+30	%	—
Transition frequency (Note 6)	f_T	—	250	—	MHz	$V_{CE} = 10\text{V}, I_E = -5\text{mA}, f = 100\text{MHz}$

Electrical Characteristics NPN Section (R1 & R2) (continued) @ $T_A = 25^\circ\text{C}$ unless otherwise specified

Characteristic	Symbol	Min	Typ	Max	Unit	Test Condition	
Input Voltage	$V_{I(off)}$	NK-DCX124EK	0.5	1.1	—	V	$V_{CC} = 5\text{V}, I_O = 100\mu\text{A}$
		NK-DCX144EK	0.5	1.1	—		
		NK-DCX114YK	0.3	—	—		
		NK-DCX123JK	0.5	—	—		
		NK-DCX114EK	0.5	1.1	—		
		NK-DCX115EK	0.5	1.1	—		
Input Voltage	$V_{I(on)}$	NK-DCX124EK	—	1.65	3.0	V	$V_O = 0.3\text{V}, I_O = 5\text{mA}$
		NK-DCX144EK	—	1.9	3.0		$V_O = 0.3\text{V}, I_O = 2\text{mA}$
		NK-DCX114YK	—	—	1.4		$V_O = 0.3\text{V}, I_O = 1\text{mA}$
		NK-DCX123JK	—	—	1.1		$V_O = 0.3\text{V}, I_O = 5\text{mA}$
		NK-DCX114EK	—	1.9	3.0		$V_O = 0.3\text{V}, I_O = 10\text{mA}$
		NK-DCX115EK	—	1.9	3.0		$V_O = 0.3\text{V}, I_O = 1\text{mA}$
Output Voltage	$V_{O(on)}$	NK-DCX124EK	—	0.1	0.3	V	$I_O/I_I = 10\text{mA} / 0.5\text{mA}$
		NK-DCX144EK	—	—	—		$I_O/I_I = 10\text{mA} / 0.5\text{mA}$
		NK-DCX114YK	—	—	—		$I_O/I_I = 5\text{mA} / 0.25\text{mA}$
		NK-DCX123JK	—	—	—		$I_O/I_I = 5\text{mA} / 0.25\text{mA}$
		NK-DCX114EK	—	—	—		$I_O/I_I = 10\text{mA} / 0.5\text{mA}$
		NK-DCX115EK	—	—	—		$I_O/I_I = 5\text{mA} / 0.25\text{mA}$
Input Current	I_I	NK-DCX124EK	—	—	0.36	mA	$V_I = 5\text{V}$
		NK-DCX144EK	—	—	0.18		
		NK-DCX114YK	—	—	0.88		
		NK-DCX123JK	—	—	3.6		
		NK-DCX114EK	—	—	0.88		
		NK-DCX115EK	—	—	0.15		
Output Current	$I_{O(off)}$	—	—	0.5	μA	$V_{CC} = 50\text{V}, V_I = 0\text{V}$	
DC Current Gain	G_I	NK-DCX124EK	80	—	—	—	$V_O = 5\text{V}, I_O = 5\text{mA}$
		NK-DCX144EK	68	—	—		$V_O = 5\text{V}, I_O = 5\text{mA}$
		NK-DCX114YK	68	—	—		$V_O = 5\text{V}, I_O = 10\text{mA}$
		NK-DCX123JK	80	—	—		$V_O = 5\text{V}, I_O = 10\text{mA}$
		NK-DCX114EK	30	—	—		$V_O = 5\text{V}, I_O = 5\text{mA}$
		NK-DCX115EK	82	—	—		$V_O = 5\text{V}, I_O = 5\text{mA}$
Input Resistor (R_1) Tolerance	ΔR_1	-30	—	+30	%	—	
Resistance Ratio Tolerance	R_2/R_1	-20	—	+20	%	—	
Transition frequency (Note 6)	f_T	—	250	—	MHz	$V_{CE} = 10\text{V}, I_E = -5\text{mA}, f = 100\text{MHz}$	

Note: 6. Transistor - for reference only.

Electrical Characteristics PNP Section (R1 only) @ $T_A = 25^\circ\text{C}$ unless otherwise specified


Characteristic (NK-DCX143TK & NK-DCX114TK only)	Symbol	Min	Typ	Max	Unit	Test Condition
Collector-Base Breakdown Voltage	BV_{CBO}	-50	—	—	V	$I_C = -50\mu\text{A}$
Collector-Emitter Breakdown Voltage	BV_{CEO}	-50	—	—	V	$I_C = -1\text{mA}$
Emitter-Base Breakdown Voltage	BV_{EBO}	-5	—	—	V	$I_E = -50\mu\text{A}$
Collector Cut-Off Current	I_{CBO}	—	—	-0.5	μA	$V_{CB} = -50\text{V}$
Emitter Cut-Off Current	I_{EBO}	—	—	-0.5	μA	$V_{EB} = -4\text{V}$
Collector-Emitter Saturation Voltage	$V_{CE(sat)}$	—	—	-0.3	V	$I_C/I_B = -2.5\text{mA} / -0.25\text{mA}$ - NK-DCX143TK $I_C/I_B = -1\text{mA} / -0.1\text{mA}$ - NK-DCX114TK
DC Current Transfer Ratio	h_{FE}	100	250	600	—	$I_C = -1\text{mA}$, $V_{CE} = -5\text{V}$
Input Resistor (R_1) Tolerance	ΔR_1	-30	—	+30	%	—
Transition frequency (Note 6)	f_T	—	250	—	MHZ	$V_{CE} = -10\text{V}$, $I_E = 5\text{mA}$, $f = 100\text{MHz}$

Electrical Characteristics PNP Section (R1 & R2) (continued) @ $T_A = 25^\circ\text{C}$ unless otherwise specified







Characteristic	Symbol	Min	Typ	Max	Unit	Test Condition
Input Voltage	$V_{I(off)}$	-0.5	-1.1	—	V	$V_{CC} = -5\text{V}$, $I_O = -100\mu\text{A}$
		-0.5	-1.1	—		
Input Voltage	$V_{I(on)}$	—	-1.9	-3.0	V	$V_O = -0.3\text{V}$, $I_O = -5\text{mA}$ $V_O = -0.3\text{V}$, $I_O = -2\text{mA}$ $V_O = -0.3\text{V}$, $I_O = -1\text{mA}$ $V_O = -0.3\text{V}$, $I_O = -5\text{mA}$ $V_O = -0.3\text{V}$, $I_O = -10\text{mA}$ $V_O = -0.3\text{V}$, $I_O = -1\text{mA}$
		—	-1.9	-3.0		
Output Voltage	$V_{O(on)}$	—	-0.1	-0.3	V	$I_O/I_I = -10\text{mA} / -0.5\text{mA}$ $I_O/I_I = -10\text{mA} / -0.5\text{mA}$ $I_O/I_I = -5\text{mA} / -0.25\text{mA}$ $I_O/I_I = -5\text{mA} / -0.25\text{mA}$ $I_O/I_I = -10\text{mA} / -0.5\text{mA}$ $I_O/I_I = -5\text{mA} / -0.25\text{mA}$
		—	-0.1	-0.3		
Input Current	I_I	—	—	-0.36 -0.18 -0.88 -3.6 -0.88 -0.15	mA	$V_I = -5\text{V}$
Output Current	$I_{O(off)}$	—	—	-0.5	μA	$V_{CC} = 50\text{V}$, $V_I = 0\text{V}$
DC Current Gain	G_I	80	—	—	—	$V_O = -5\text{V}$, $I_O = -5\text{mA}$ $V_O = -5\text{V}$, $I_O = -5\text{mA}$ $V_O = -5\text{V}$, $I_O = -10\text{mA}$ $V_O = -5\text{V}$, $I_O = -10\text{mA}$ $V_O = -5\text{V}$, $I_O = -5\text{mA}$ $V_O = -5\text{V}$, $I_O = -5\text{mA}$
		68	—	—		
DC Current Gain	G_I	68	—	—	—	$V_O = -5\text{V}$, $I_O = -10\text{mA}$ $V_O = -5\text{V}$, $I_O = -10\text{mA}$ $V_O = -5\text{V}$, $I_O = -5\text{mA}$ $V_O = -5\text{V}$, $I_O = -5\text{mA}$
		80	—	—		
DC Current Gain	G_I	30	—	—	—	$V_O = -5\text{V}$, $I_O = -5\text{mA}$ $V_O = -5\text{V}$, $I_O = -5\text{mA}$
		82	—	—		
Input Resistor (R_1) Tolerance	ΔR_1	-30	—	+30	%	—
Resistance Ratio Tolerance	R_2/R_1	-20	—	+20	%	—
Transition Frequency (Note 6)	f_T	—	250	—	MHZ	$V_{CE} = -10\text{V}$, $I_E = -5\text{mA}$, $f = 100\text{MHz}$

Note: 6. Transistor - for reference only.


Typical Curves – Total Device

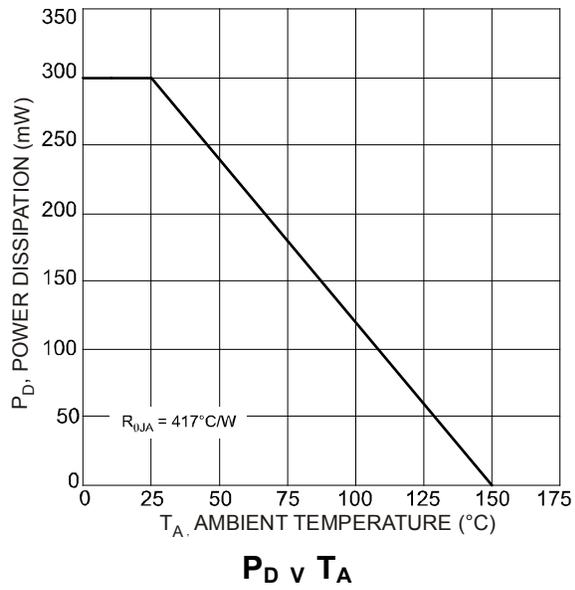


Typical Curves – NK-DCX124EK PNP Section

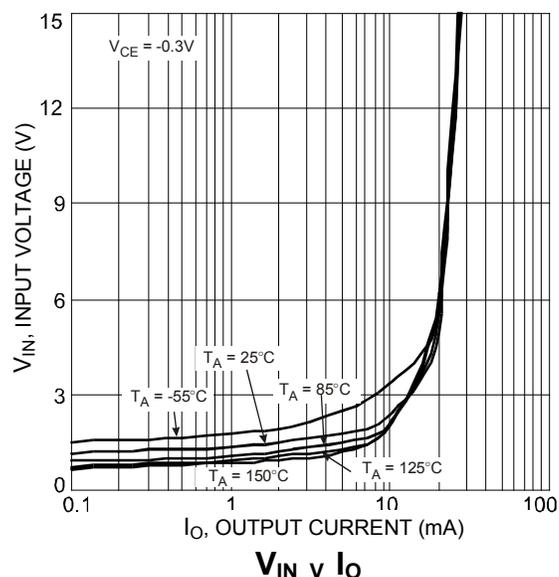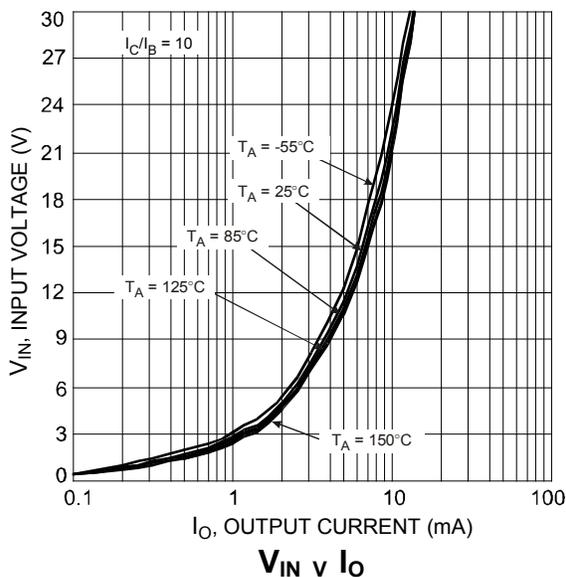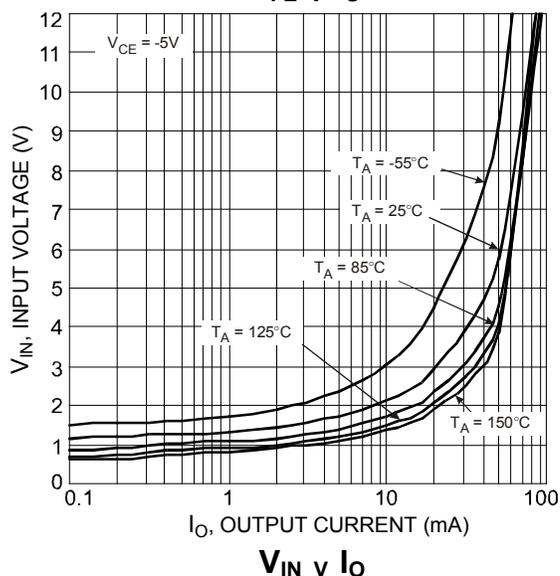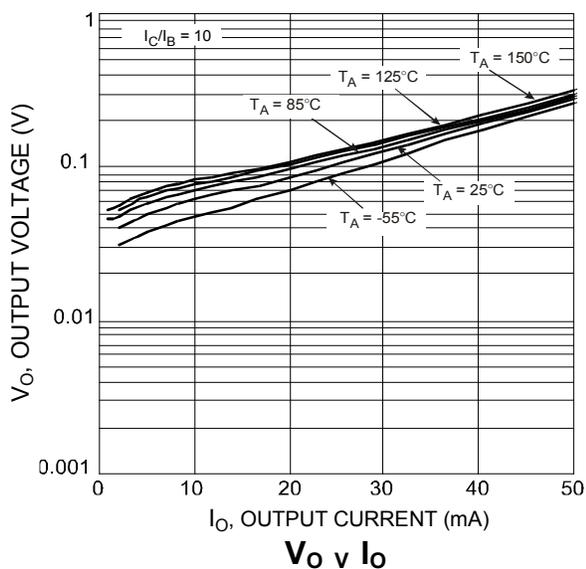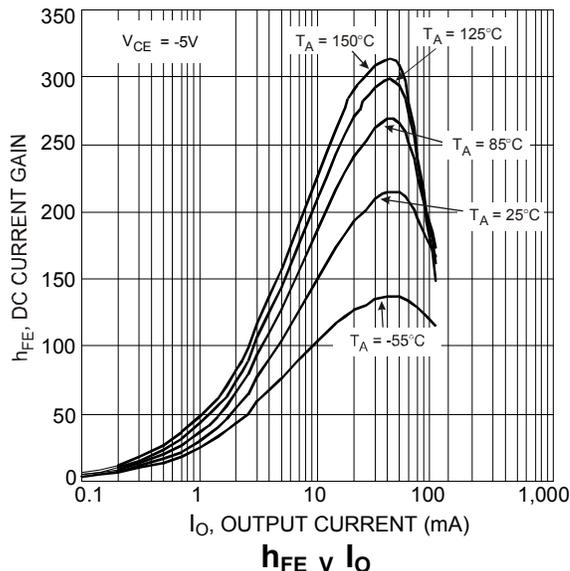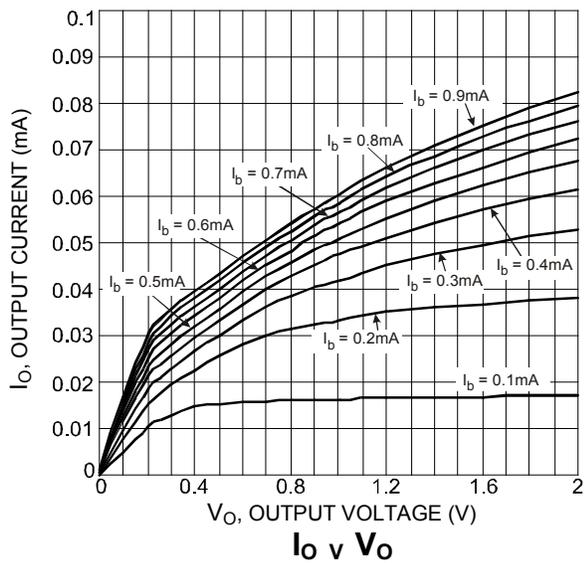


Typical Curves – NK-DCX124EK NPN Section

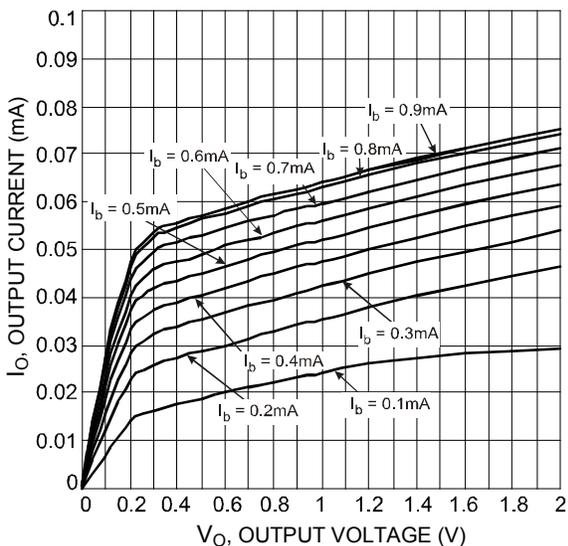


I_O v V_O

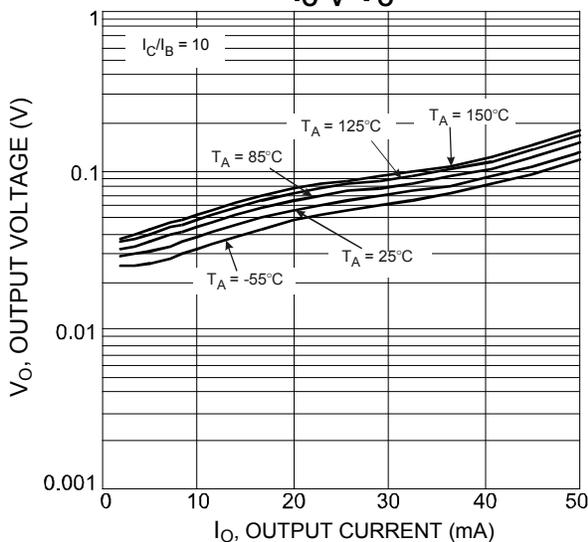


V_O v I_O

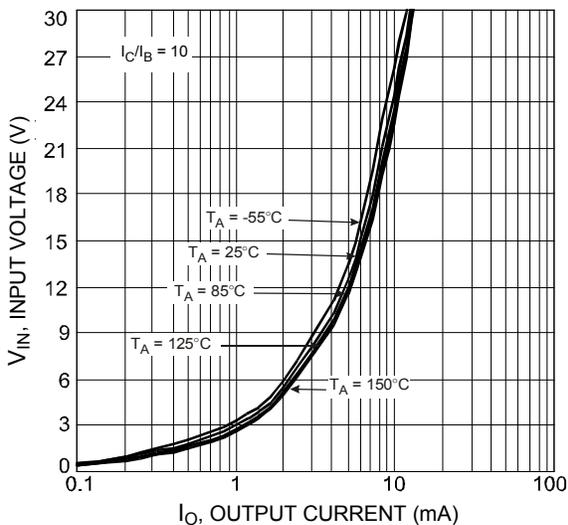


V_{IN} v I_O

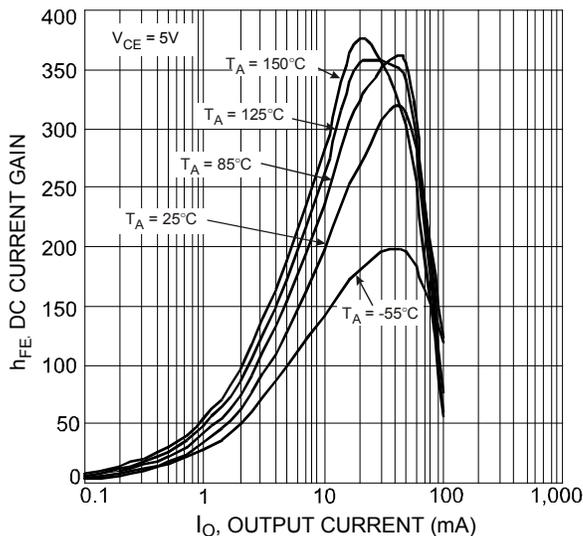

h_{FE} v I_O

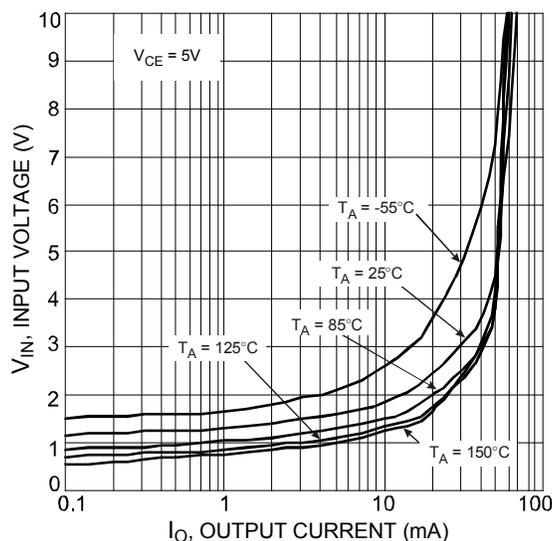


V_{IN} v I_O

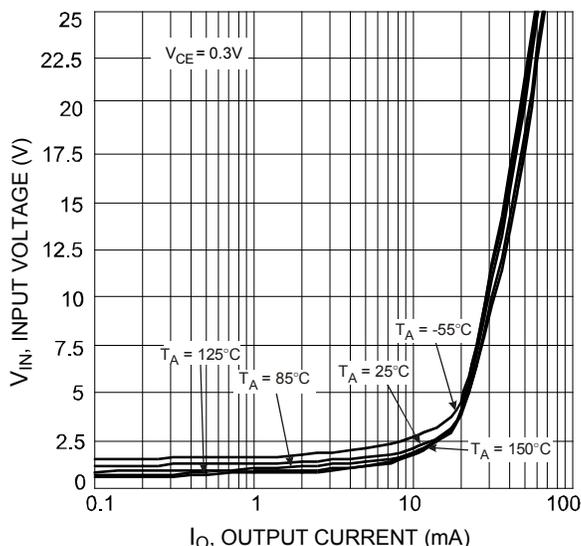


V_{IN} v I_O


Typical Curves – NK-DCX123JK PNP Section

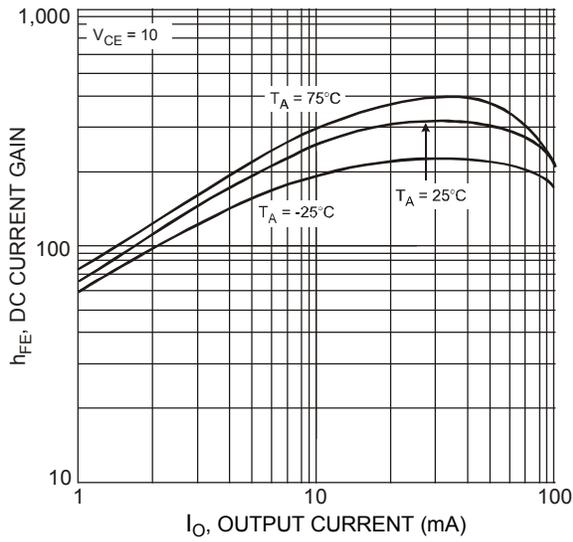


$h_{FE} \text{ v } I_O$

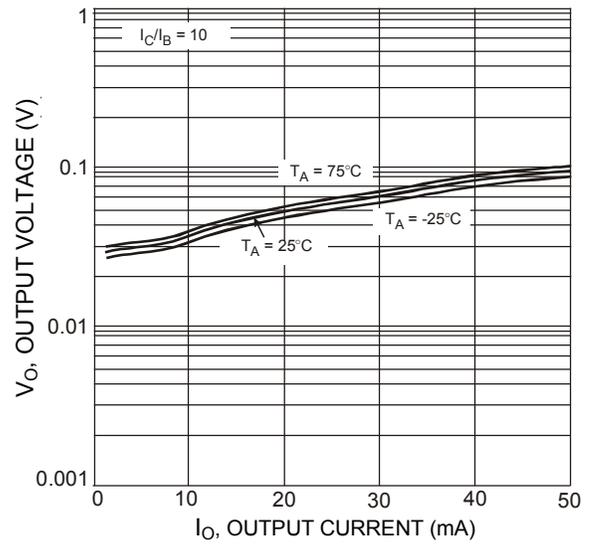

$V_O \text{ v } I_O$

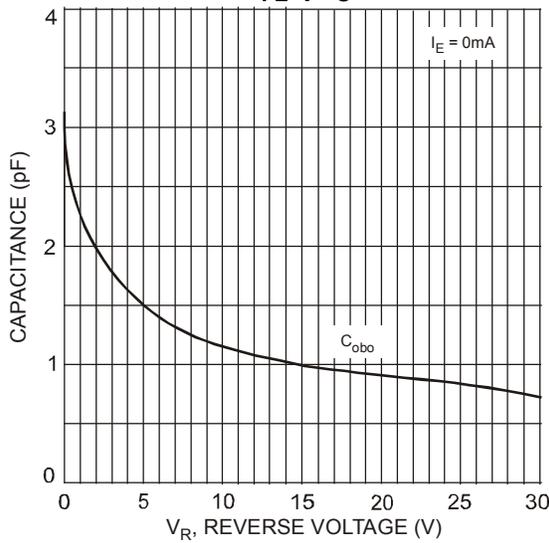

$C \text{ v } V_R$

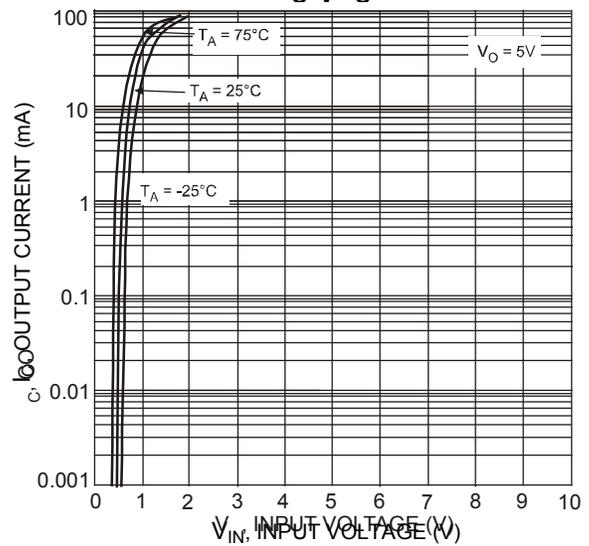

$I_O \text{ v } V_{IN}$



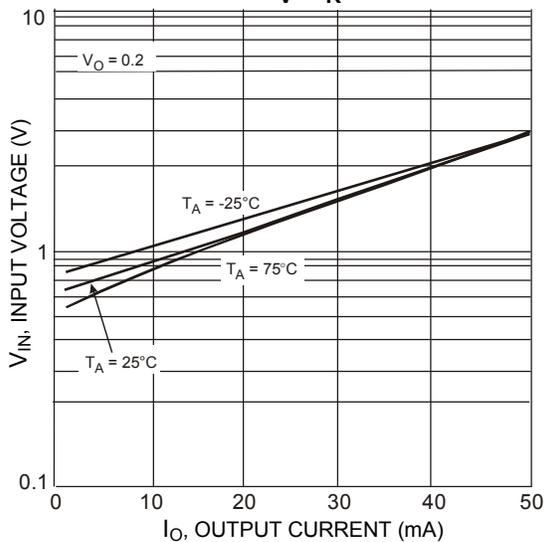


Fig. 18 Input Voltage vs. Collector Current


Typical Curves – NK-DCX123JK NPN Section

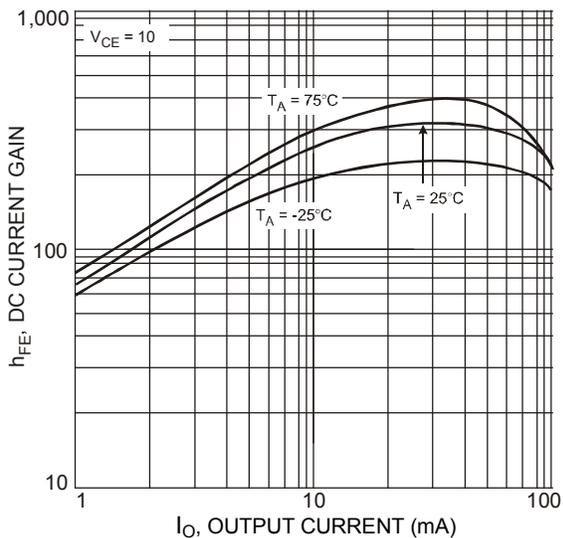


$h_{FE} \text{ v } I_O$

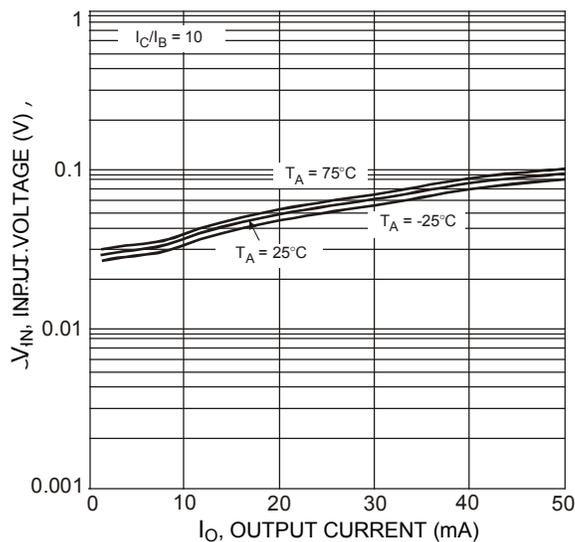


$V_{IN} \text{ v } I_O$

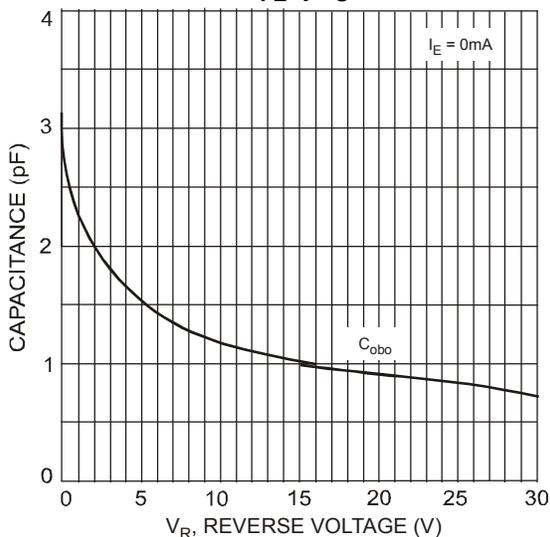

$C \text{ v } V_R$

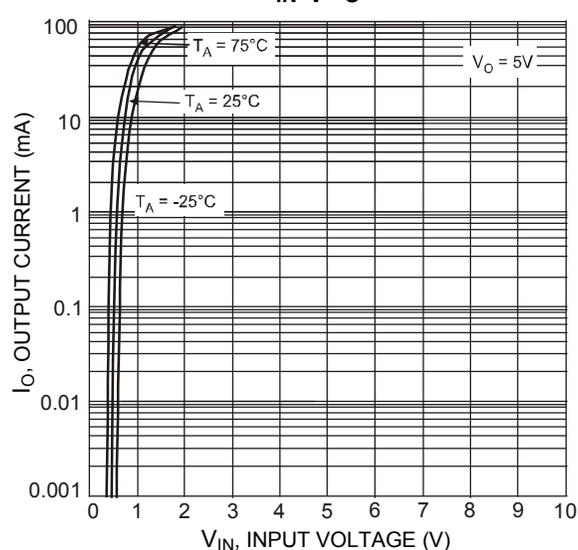


$I_O \text{ v } V_{IN}$

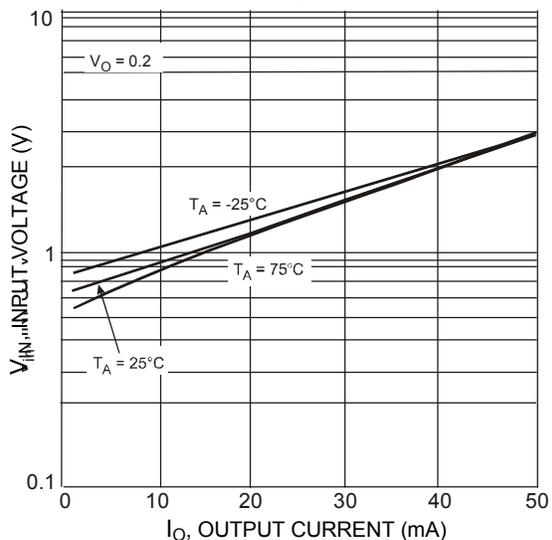


$V_{IN} \text{ v } I_O$


Typical Curves – NK-DCX114TK PNP Section

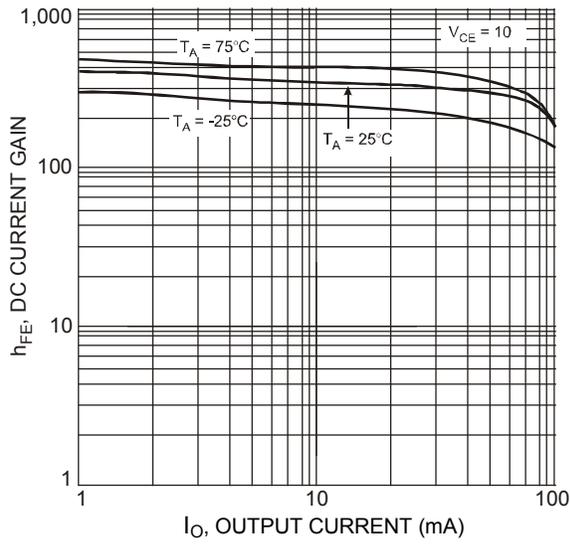


$h_{FE} \ v \ I_O$

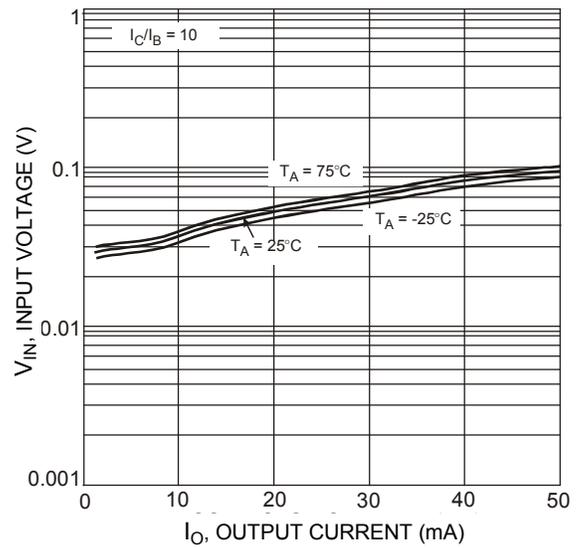


$V_{IN} \ v \ I_O$

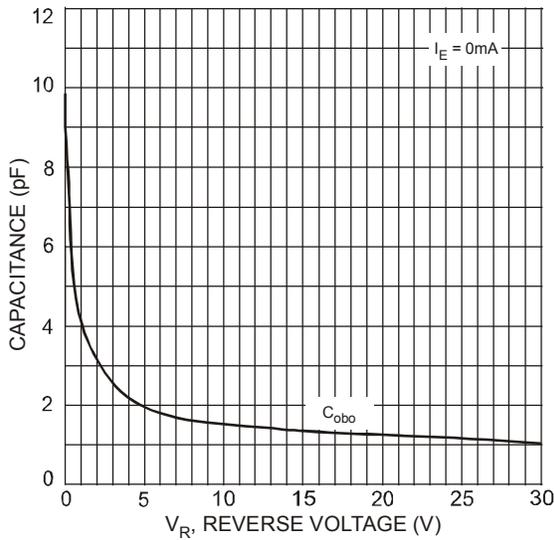

$C \ v \ V_R$

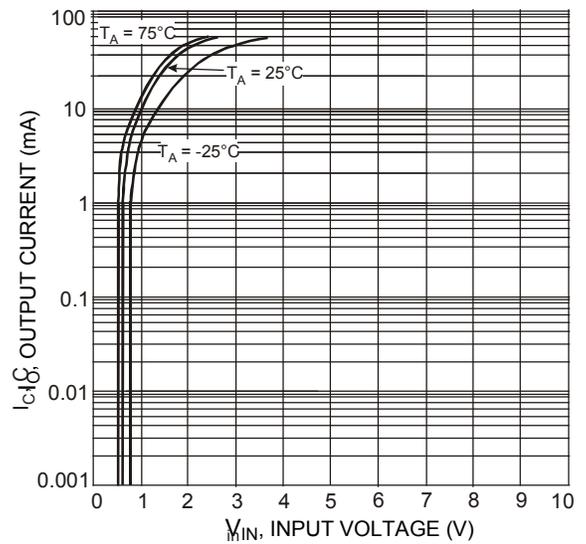


$I_O \ v \ V_{IN}$

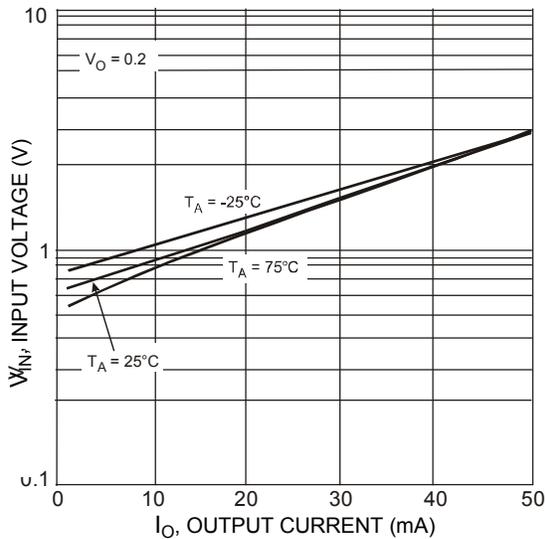


$V_{IN} \ v \ I_O$


Typical Curves- NK-DCX114TK NPN Section

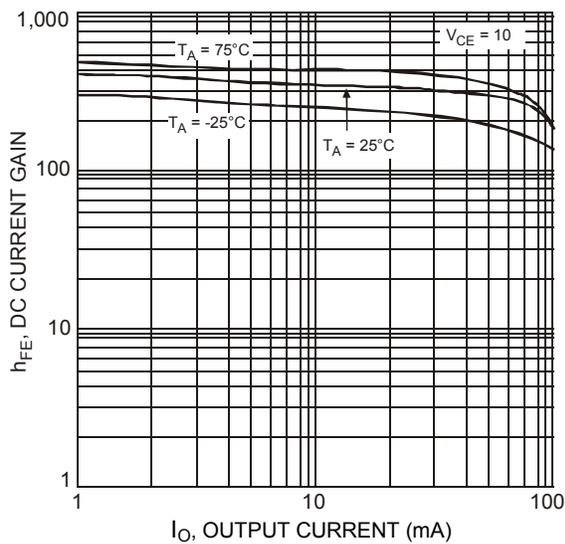


$h_{FE} \ v \ I_O$

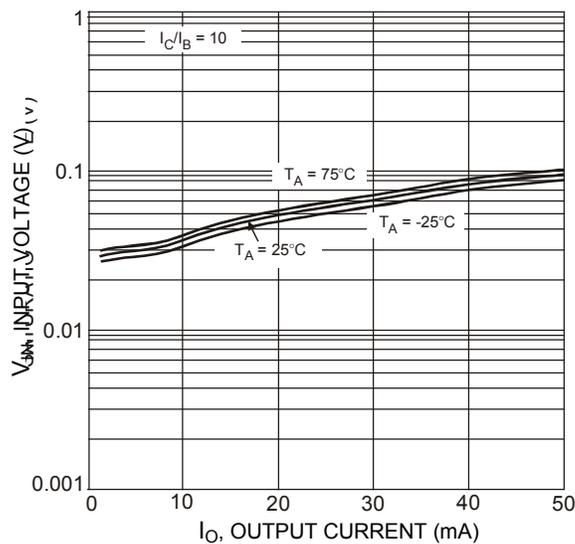


$V_{IN} \ v \ I_O$

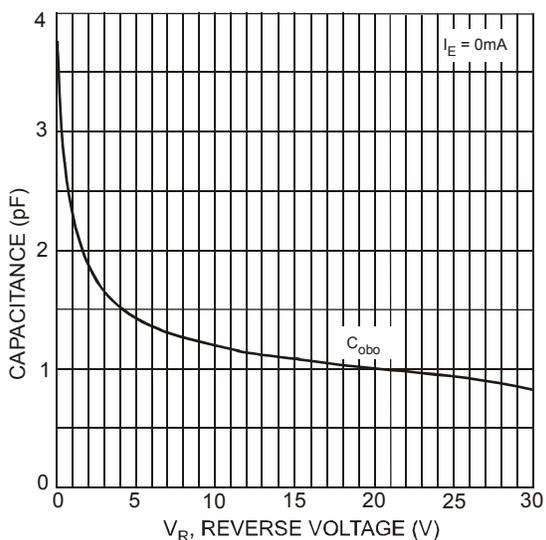

$C \ v \ V_R$

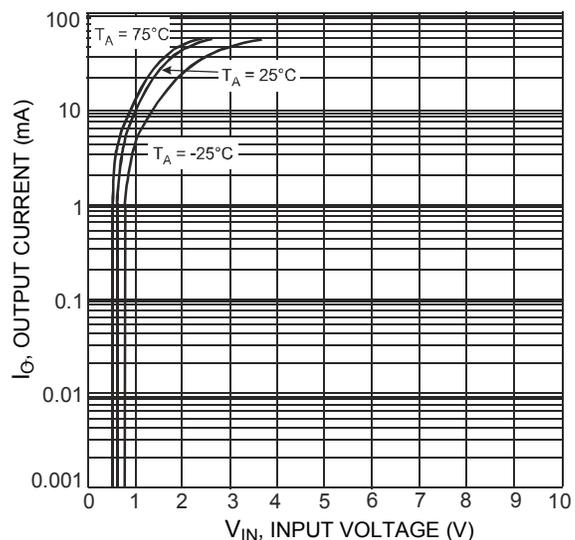


$I_O \ v \ V_{IN}$

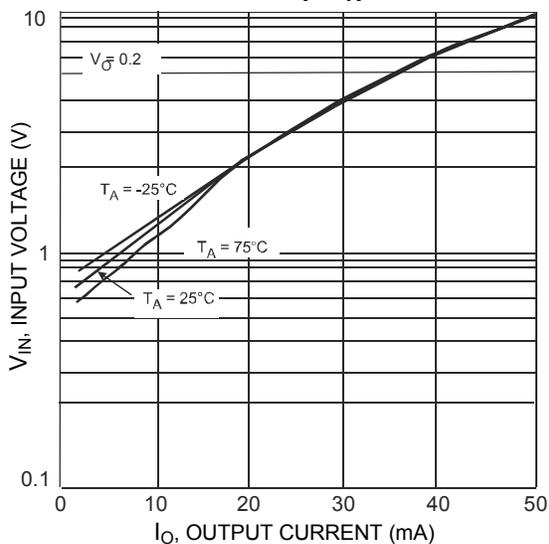

$V_{IN} \ I_O$

Package Outline Dimensions

SOT26

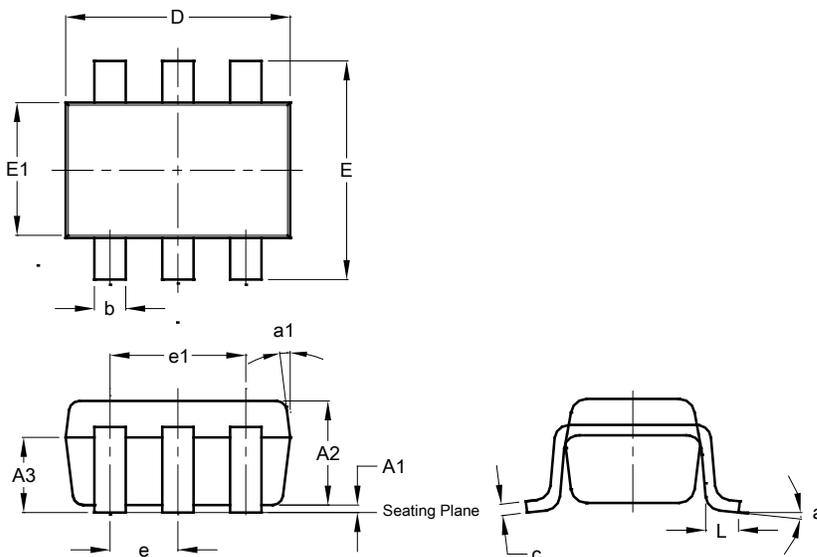


SOT26			
Dim	Min	Max	Typ
A1	0.013	0.10	0.05
A2	1.00	1.30	1.10
A3	0.70	0.80	0.75
b	0.35	0.50	0.38
c	0.10	0.20	0.15
D	2.90	3.10	3.00
e	-	-	0.95
e1	-	-	1.90
E	2.70	3.00	2.80
E1	1.50	1.70	1.60
L	0.35	0.55	0.40
a	-	-	8°
a1	-	-	7°

All Dimensions in mm

Suggested Pad Layout

SOT26

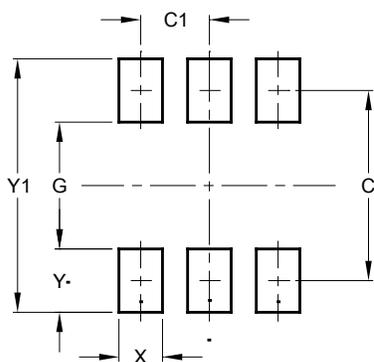

Dimensions	Value (in mm)
C	2.40
C1	0.95
G	1.60
X	0.55
Y	0.80
Y1	3.20